

CAB105DC-03W-1

Former P/N: BH-131A

 Rev. 2-2020
 RoHS3 & REACH
 Battery Assembly


Physical Characteristics


MATERIALS

Housing	Plastic, PP Resin, Black
Contact	65C Spring Wire
Wire	UL 1007, 26 AWG

TEMPERATURE RANGES

Operating	-20 to +65 °C
Storage	-30 to +85 °C

Cell Type	D Cell, or equivalent
-----------	-----------------------

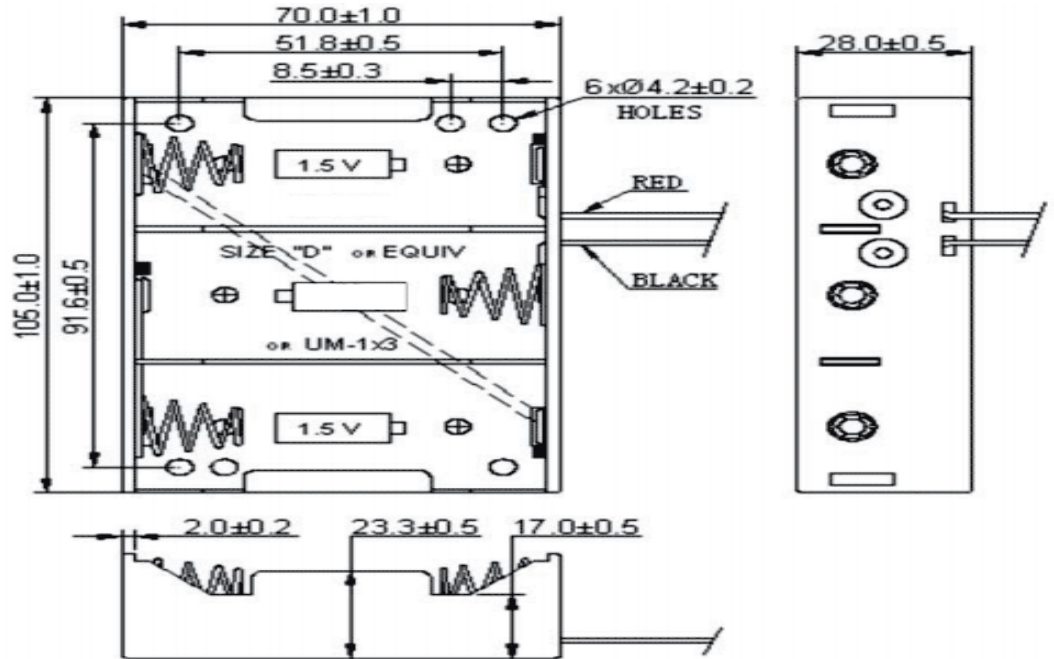

Revision	Description	By	Date
1-2018	Migrate to new format	JL	2018-06-20
2-2020	Remove old PN from drawing	WS	2020-03-03

Warranty: For a period of one (1) year from date of shipping under normal operations conditions This warranty does not apply to products damaged through misuse, abuse, improper installation, alteration, rework, or attempt to repair.

The information contained herein is believed to be correct, but no guarantee or warranty, express or implied, with respect to accuracy, completeness or results is extended and no liability is assumed. Challenge Electronics reserves the right to make changes in any specification, data or material contained herein.

©2020 Challenge Electronics, Inc. Pub. 20200303150758