


CAB105DC-03W-1

Former P/N: BH131A

Rev. 4-2026
RoHS3 & REACH
Battery Assembly



Physical Characteristics


MATERIALS

Housing	Black PP UL 94 V-0
Contact	Steel, Nickel Plated
Wire	UL1007, 24 AWG

TEMPERATURE RANGES

Operating	-20 to +65 °C
Storage	-30 to +85 °C

Cell Type D Cell, or equivalent

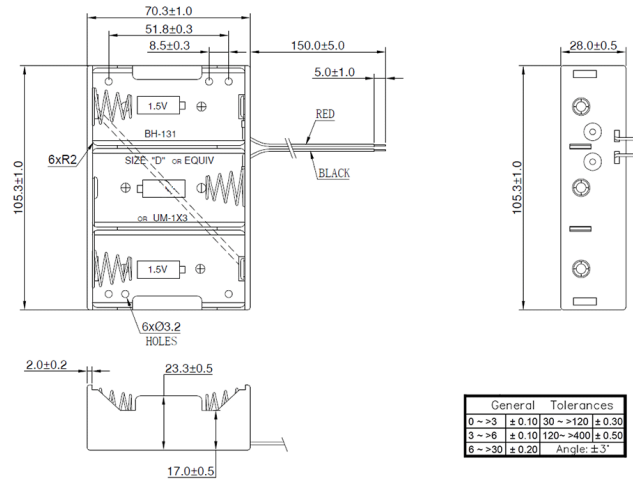

All measurements in mm unless otherwise noted.

Revision	Description	By	Date
3-2023	Added part image.	SK	2023-05-22
4-2026	Updated Mechanical Drawing. Updated the Housing material from Plastic, PP Resin, Black to Black PP UL 94 V-0. Updated to include Contact material. Updated the Wire Gauge from UL 1007, 26 AWG to UL 1007, 24 AWG.	KG	2026-06-17

Warranty: For a period of one (1) year from date of shipping under normal operations conditions. This warranty does not apply to products damaged through misuse, abuse, improper installation, alteration, rework, or attempt to repair.

The information contained herein is believed to be correct, but no guarantee or warranty, express or implied, with respect to accuracy, completeness or results is extended and no liability is assumed. Challenge Electronics reserves the right to make changes in any specification, data or material contained herein.