

CAB108A2-08W-1

Former P/N: BH-382A

Rev. 3-2023
RoHS3 & REACH
Battery Assembly



Physical Characteristics



MATERIALS

Housing	Plastic, PP Resin, Black
Contact	65C Spring Wire
Wire	UL 1007, 26 AWG

TEMPERATURE RANGES

Operating	-20 to +65 °C
Storage	-30 to +85 °C

Cell Type AA, or equivalent

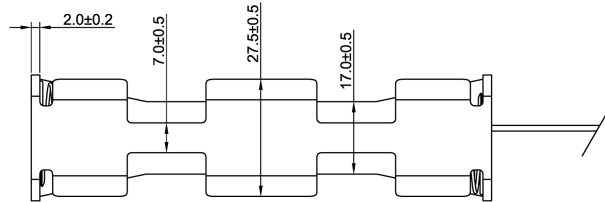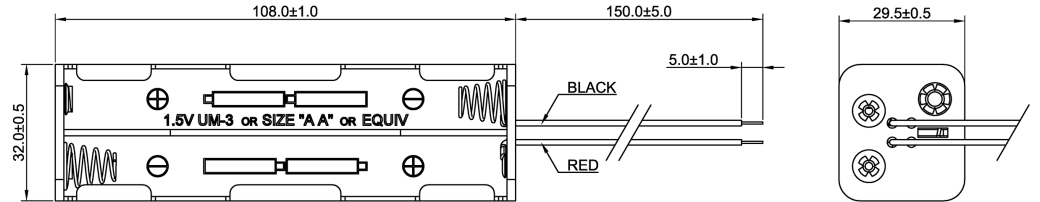

General Tolerances			
0 ~ >3	± 0.10	30 ~ >120	± 0.30
3 ~ >6	± 0.10	120 ~ >400	± 0.50
6 ~ >30	± 0.20	Angle: ±3°	

All measurements in mm unless otherwise noted.

Revision	Description	By	Date
2-2018	Migrate to new format.	WS	2018-02-22
3-2023	Updated Mechanical Drawing.	SK	2023-07-18

Warranty: For a period of one (1) year from date of shipping under normal operations conditions. This warranty does not apply to products damaged through misuse, abuse, improper installation, alteration, rework, or attempt to repair.

The information contained herein is believed to be correct, but no guarantee or warranty, express or implied, with respect to accuracy, completeness or results is extended and no liability is assumed. Challenge Electronics reserves the right to make changes in any specification, data or material contained herein.