

INDICATORS • SPEAKERS • SOUND TRANSDUCERS • ENCLOSURES • MICROPHONES • BATTERY ACCESSORIES

## CAB151A2-10D-1

Former P/N: BH-3101D

Rev. 1-2018  
RoHS3 & REACH  
Battery Assembly



### Physical Characteristics


#### MATERIALS

|         |                          |
|---------|--------------------------|
| Housing | Plastic, PP Resin, Black |
| Contact | 65C Spring Wire          |

#### TEMPERATURE RANGES

|           |               |
|-----------|---------------|
| Operating | -20 to +65 °C |
| Storage   | -30 to +85 °C |

Cell Type AA, or equivalent

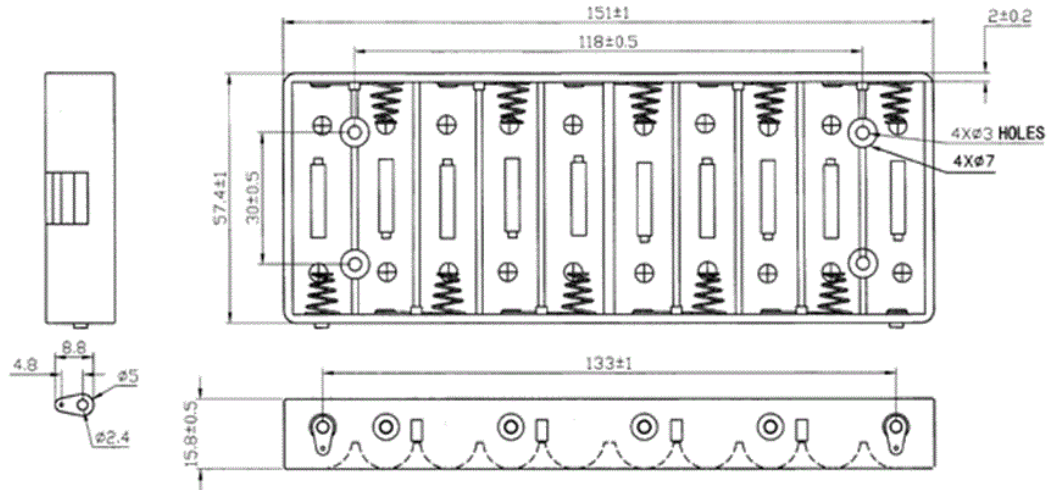

| Revision | Description           | By | Date       |
|----------|-----------------------|----|------------|
| 1-2018   | Migrate to new format | WS | 2018-02-22 |

Warranty: For a period of one (1) year from date of shipping under normal operations conditions This warranty does not apply to products damaged through misuse, abuse, improper installation, alteration, rework, or attempt to repair.

The information contained herein is believed to be correct, but no guarantee or warranty, express or implied, with respect to accuracy, completeness or results is extended and no liability is assumed. Challenge Electronics reserves the right to make changes in any specification, data or material contained herein.  
©2019 Challenge Electronics, Inc. 20190826154023