

## CAB29LH-01T-1

Former P/N: CH25-2325LF

Rev. 1-2023  
RoHS3 & REACH  
Battery Assembly



### Physical Characteristics

#### MATERIALS

Housing PBT UL94V0


Contact Tin Plated Nickel,  
0.6mm Thickness

#### TEMPERATURE RANGES

Operating -40 to +105 °C

Storage -40 to +105 °C

Cell Type CR23 Series, or equivalent

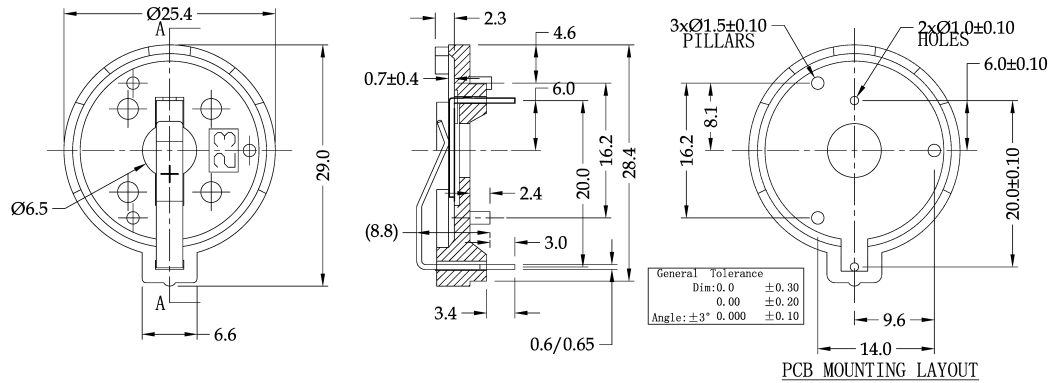

All measurements in mm unless otherwise noted.

Revision	Description	By	Date
0-2005	Original Specification.	SL	2005-06-30
1-2023	Migrate to new format.	SK	2023-08-02

Warranty: For a period of one (1) year from date of shipping under normal operations conditions. This warranty does not apply to products damaged through misuse, abuse, improper installation, alteration, rework, or attempt to repair.

The information contained herein is believed to be correct, but no guarantee or warranty, express or implied, with respect to accuracy, completeness or results is extended and no liability is assumed. Challenge Electronics reserves the right to make changes in any specification, data or material contained herein.