

CAB79A2-04W-1X

Former P/N: SBH-341-5A

Rev. 1-2023
RoHS3 & REACH
IP68
Battery Assembly



Physical Characteristics


MATERIALS

Housing	Plastic
Wire	UL1007, 26 AWG

TEMPERATURE RANGES

Operating	-20 to +85 °C
Storage	-30 to +85 °C

Cell Type AA, or equivalent

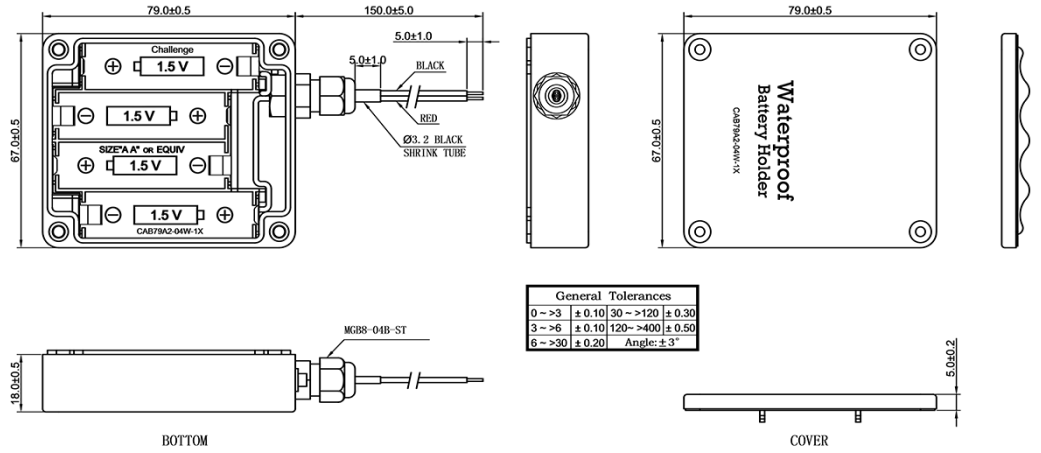

All measurements in mm unless otherwise noted.

Revision	Description	By	Date
0-2021	Original Specification	CT	2021-09-09
1-2023	Added former PN.	AL	2023-05-23

Warranty: For a period of one (1) year from date of shipping under normal operations conditions. This warranty does not apply to products damaged through misuse, abuse, improper installation, alteration, rework, or attempt to repair.

The information contained herein is believed to be correct, but no guarantee or warranty, express or implied, with respect to accuracy, completeness or results is extended and no liability is assumed. Challenge Electronics reserves the right to make changes in any specification, data or material contained herein.