


INDICATORS • SPEAKERS • SOUND TRANSDUCERS • ENCLOSURES • MICROPHONES • BATTERY ACCESSORIES

## CAC26-01W100-06-1

Rev. 1-2021  
RoHS3 & REACH  
Chamber Assembly



### Operating Characteristics

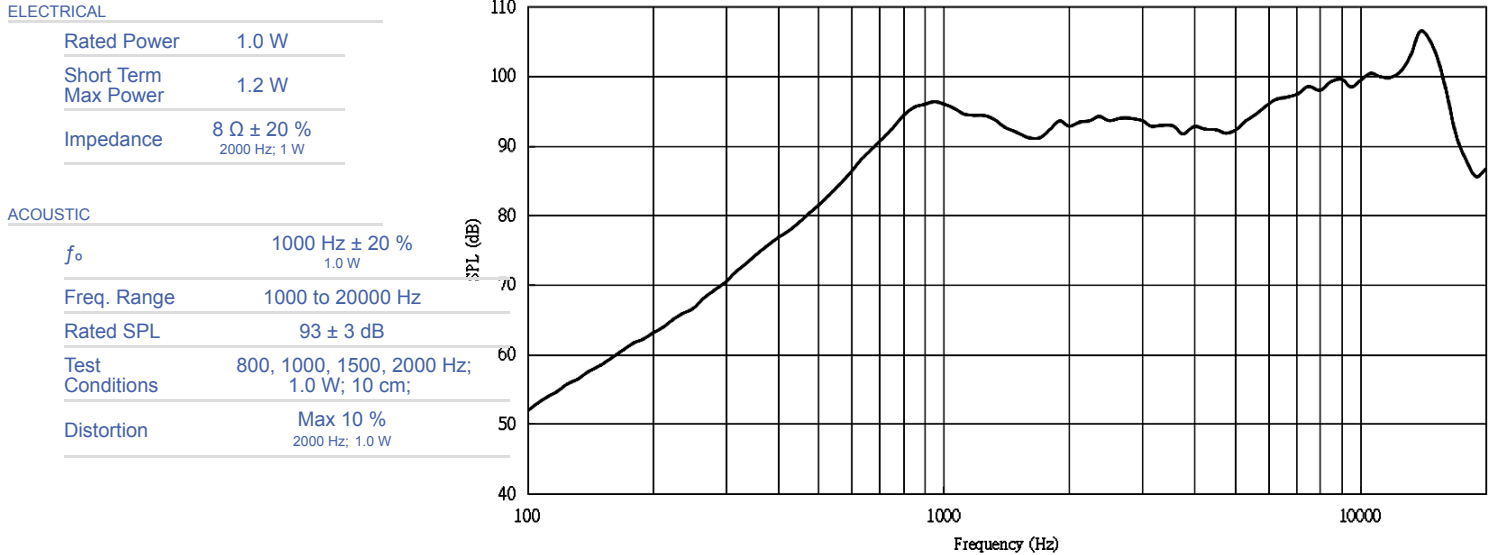


### Physical Characteristics

MATERIALS	
Chamber Housing	PC+ABS C6200 + Stainless Steel
Speaker Frame	PPA
Diaphragm	PEEK
Magnet	NdFeB
Wires	UL1571, 32AWG

TEMPERATURE RANGES	
Operating	-30 to +70 °C
Storage	-40 to +85 °C

Weight	4.3 g
Number of Magnets	1
Speaker Part #	CS17-01P100-03-1

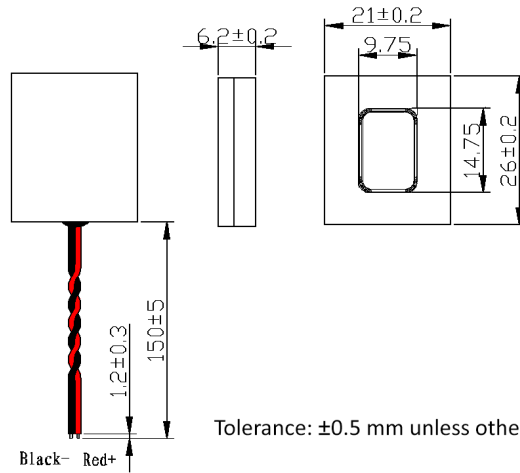

Tolerance: ±0.5 mm unless otherwise noted.

All Measurements are mm unless noted otherwise.

Revision	Description	By	Date
0-2020	Original Specification.	WS	2020-10-19
1-2021	Updated callout from Min SPL to Rated SPL.	CT	2021-03-08

Warranty: For a period of one (1) year from date of shipping under normal operations conditions. This warranty does not apply to products damaged through misuse, abuse, improper installation, alteration, rework, or attempt to repair.

The information contained herein is believed to be correct, but no guarantee or warranty, express or implied, with respect to accuracy, completeness or results is extended and no liability is assumed. Challenge Electronics reserves the right to make changes in any specification, data or material contained herein.

©2021 Challenge Electronics, Inc. Pub. 20210315133927