

INDICATORS • SPEAKERS • SOUND TRANSDUCERS • ENCLOSURES • MICROPHONES • BATTERY ACCESSORIES

CAC26-01W100-08-1

Former P/N: CAC26W-01100-081

Rev. 1-2021
RoHS3 & REACH
Chamber Assembly




Operating Characteristics

ELECTRICAL

Rated Power	1.2 W
Short Term Max Power	1.5 W
Impedance	6 Ω ± 20 % 2000 Hz; 1.2 W

ACOUSTIC

f_o	1000 Hz ± 20 % 1.2 W
Freq. Range	500 to 20000 Hz
Rated SPL	95 ± 3 dB
Test Conditions	2000 Hz; 1.2 W; 10 cm;
Distortion	<10 % 2000 Hz; 1.0 W

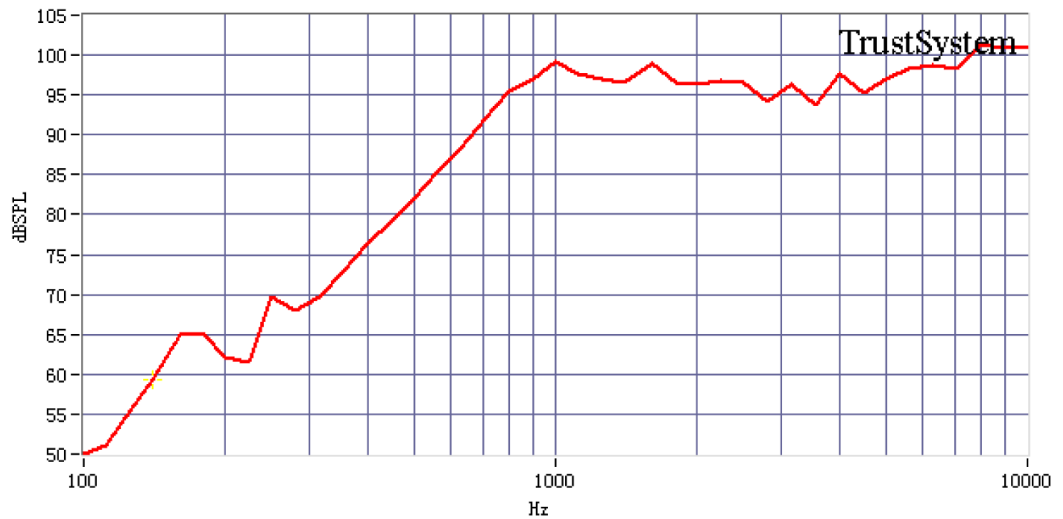

Physical Characteristics

MATERIALS


Speaker Box Frame	ABS + PC
Speaker Frame	PPA
Cone	PEEK
Magnet	NdFeB
Wire	UL1571, 32AWG
Connector	MX1.25-2P

TEMPERATURE RANGES

Operating	-20 to +70 °C
Storage	-40 to +85 °C

Weight	2.8 g
Number of Magnets	1
Speaker Part #	CS15-01P95-03-2

Tolerance: ± 0.2 Unless otherwise specified

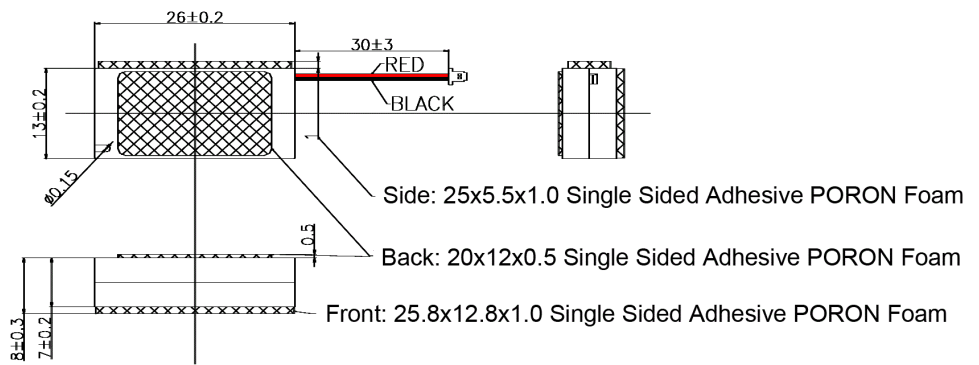

All Measurements are mm unless noted otherwise.

Revision	Description	By	Date
0-2018	Initial Specification Sheet	JL	2018-09-14
1-2021	Updated callout from Min SPL to Rated SPL.	CT	2021-03-08

Warranty: For a period of one (1) year from date of shipping under normal operations conditions. This warranty does not apply to products damaged through misuse, abuse, improper installation, alteration, rework, or attempt to repair.

The information contained herein is believed to be correct, but no guarantee or warranty, express or implied, with respect to accuracy, completeness or results is extended and no liability is assumed. Challenge Electronics reserves the right to make changes in any specification, data or material contained herein.
©2021 Challenge Electronics, Inc. Pub. 20210315141122