

CAC45-02W70-06-1

Rev. 0-2022
RoHS3 & REACH
Chamber Assembly




Operating Characteristics

ELECTRICAL

Rated Power	2 W
Short Term Max Power	2.2 W
Impedance	4 Ω ± 20 % 2000 Hz; 2 W

ACOUSTIC

f_0	700 Hz ± 20 % 2 W; 10 cm
Freq. Range	700 to 20,000 Hz
Rated SPL	92 ± 3 dB
Test Conditions	2000 Hz; 2 W; 10 cm;
Distortion	≤ 10 % 1000 Hz; 2 W

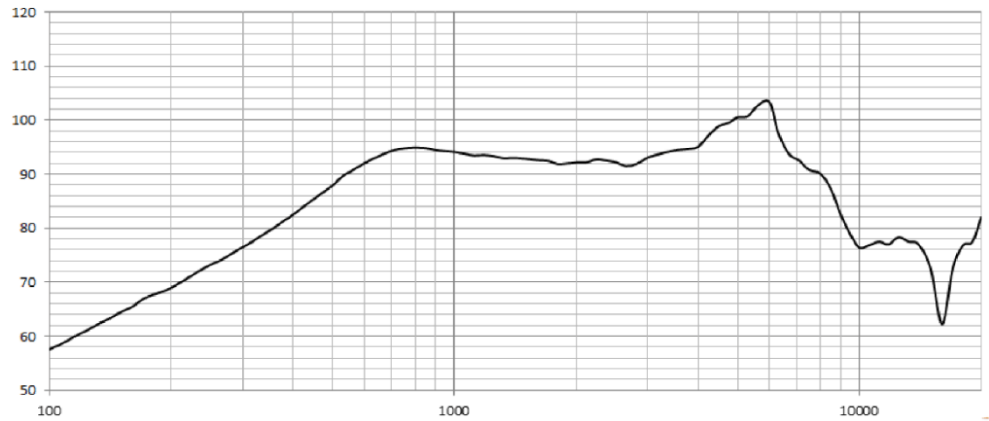

Physical Characteristics

MATERIALS


Chamber Housing	PC540
Speaker Housing	PPA
Diaphragm	PEEK
Magnet	NdFeB
Connector	50375-00211-004
Wire	UL10064, 32 AWG

TEMPERATURE RANGES

Operating	-25 to +65 °C
Storage	-40 to +80 °C

Weight	7.5 g
Number of Magnets	1
Speaker Part #	CS34-02P65-03-1

General tolerance = ±0.2 mm and all measurements in mm unless otherwise noted.

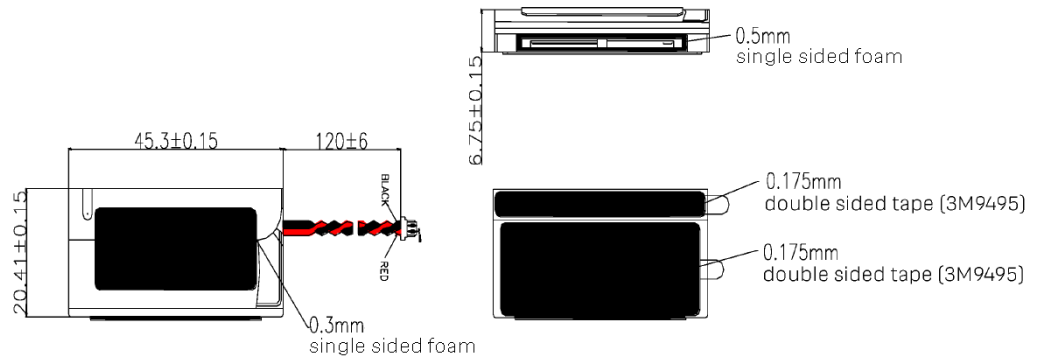

Revision	Description	By	Date
0-2022	Original Specification	AL	2022-08-29

Warranty: For a period of one (1) year from date of shipping under normal operations conditions. This warranty does not apply to products damaged through misuse, abuse, improper installation, alteration, rework, or attempt to repair.

The information contained herein is believed to be correct, but no guarantee or warranty, express or implied, with respect to accuracy, completeness or results is extended and no liability is assumed. Challenge Electronics reserves the right to make changes in any specification, data or material contained herein.