

INDICATORS • SPEAKERS • SOUND TRANSDUCERS • ENCLOSURES • MICROPHONES • BATTERY ACCESSORIES

## CAB79SH-04W-2X

Former P/N: SBH-341-5A

Rev. 1-2017  
RoHS3 & REACH & IP68  
Battery Assembly



### Physical Characteristics


#### MATERIALS

Housing	ABS Resin (black)
Contact	Spring Steel Nickel-Plated
Wire	UL 1007, 26 AWG

#### TEMPERATURE RANGES

Operating	-20 to +65 °C
Storage	-30 to +85 °C

Cell Type Safety Holder, or equivalent

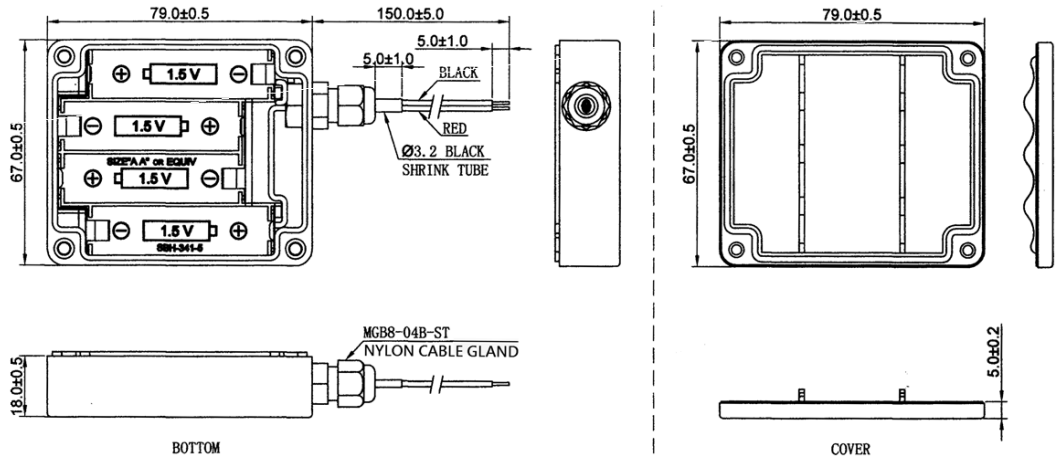

Revision	Description	By	Date
0-2012	Initial Specification Sheet	EZ	2012-03-26
1-2017	Migrate to new format	JL	2017-10-10

Warranty: For a period of one (1) year from date of shipping under normal operations conditions This warranty does not apply to products damaged through misuse, abuse, improper installation, alteration, rework, or attempt to repair.

The information contained herein is believed to be correct, but no guarantee or warranty, express or implied, with respect to accuracy, completeness or results is extended and no liability is assumed. Challenge Electronics reserves the right to make changes in any specification, data or material contained herein.  
©2019 Challenge Electronics, Inc. 20190826154548