




PRODUCT INFORMATION

PART #	BH-3101D	Revision: 0-2012
	10 AA Batteries Holder	Image not available
ISO 9001		

SPECIFICATIONS


Battery (Cell) Type	AA		Number of Cells	10		
Cell Configuration	Series Connection		Output Power	15 Vdc		
Operating Temperature	-20°C to + 65°C		Storage Temperature	-30°C to +85°C		
Material	Case	Plastic, PP Resin, Black		Washer		
	Contact	Springs, 0.7 mm, 65C Spring Wire				
	Termination	Solder Lug				
Physical Dimensions	Length (L)	151.0 mm	Width (W)	57.4 mm	Height (H)	15.8 mm
Approximate Weight	grams		Compliance	RoHS		
Options						

RELIABILITY

Insulation Test	A minimum of 10 MΩ, measured with 100 Vdc Insulation Resistance Meter, between the Electrical Terminals and the Case
Vibration Test	2 Hours of at 1.5 mm with 10 to 55 Hz. vibration frequency to each of 3 perpendicular directions
Termination Strength	Maximum of 9.8 N (1.0 Kg) load pull test, applied to each terminal in axial direction for 10 seconds
Drop Test	Dropped naturally from 750 mm height onto the surface of 40 mm wooden board, 3 axes (X,Y,Z) directions, 3 times (6 times total)
Warranty	For a period of one (1) year from date of shipping under normal operations conditions

DIMENSIONS

Dimensions in mm; Tolerance ±0.5 mm

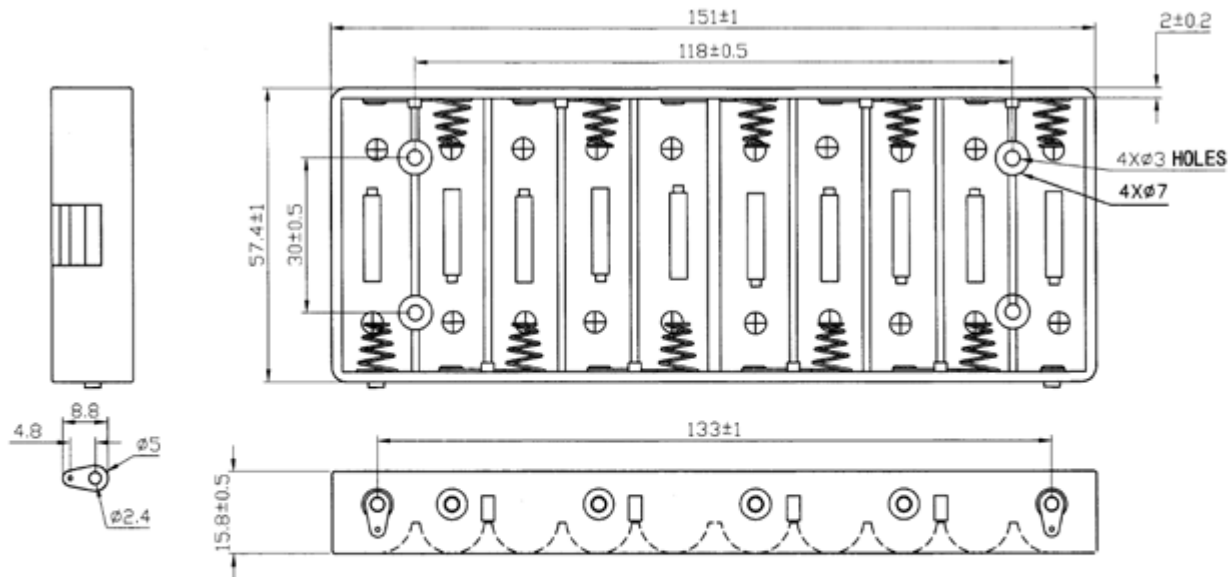

SPECIFICATION

- (1) TIEM NO: BH-3101D
- (2) MATERIAL: ABS RESIN BLACK COLOR
- (3) WITH SOLDER LUG: 8.8M/M
- (4) SPRING: 0.7MM 65C SPRING WIRE