



PRODUCT INFORMATION

PART #	BH-341-1DS	Revision: 0-2014
---------------	-------------------	-------------------------

	4 AA Batteries Holder
ISO 9001	


SPECIFICATIONS

Battery (Cell) Type	AA	Number of Cells	4
Cell Configuration	Series Connection	Output Voltage	6 Vdc
Operating Temperature	-20°C to + 65°C	Storage Temperature	-30°C to +85°C
Material	Case	Plastic, PP Resin, Black	Washer
	Contact	Spring 0.7 mm 65 C Spring Wire	
	Termination	Solder Tabs (small)	
Physical Dimensions	Length (L)	63.1 mm	Width (W)
			58 mm
			Height (H)
			16 mm
Approximate Weight	grams	Compliance	RoHS
Options			

RELIABILITY

Insulation Test	A minimum of 10 MΩ, measured with 100 Vdc Insulation Resistance Meter, between the Electrical Terminals and the Case
Vibration Test	2 Hours of at 1.5 mm with 10 to 55 Hz. vibration frequency to each of 3 perpendicular directions
Termination Strength	Maximum of 9.8 N (1.0 Kg) load pull test, applied to each terminal in axial direction for 10 seconds
Drop Test	Dropped naturally from 750 mm height onto the surface of 40 mm wooden board, 3 axes (X,Y,Z) directions, 3 times (6 times total)
Warranty	For a period of one (1) year from date of shipping under normal operations conditions

DIMENSIONS

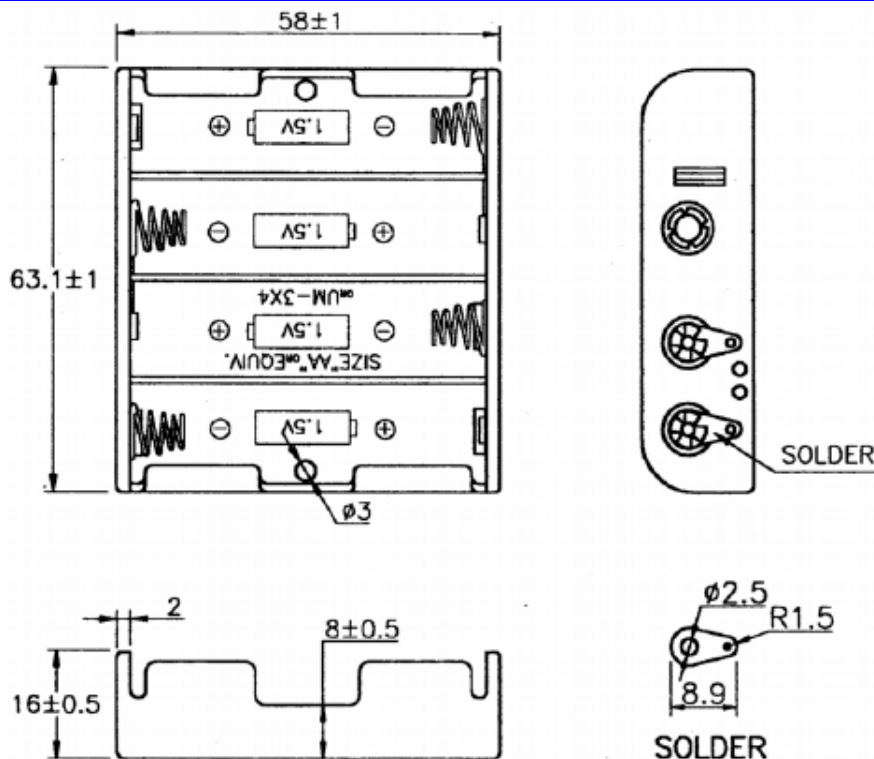

Revision	Description	By	Date