
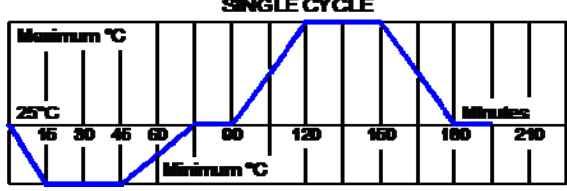




PRODUCT INFORMATION

Part #: **CE-BCX515ASS**

Revision: 4-2015

DESCRIPTION		FEATURES					
Challenge Electronics Dual-Function BEEPING or CONTINUOUS Tones, EXTRA Loud, 5 to 15 Vdc, A style case Rear Panel Mounting in 1.125" (28.6 mm) Hole, Sound Pressure Level of 103 dB(A) at 15 Vdc at 61 cm, 2,900 Hz. Output Frequency, S three 0.25" (6.4 mm) Blades with M3 0.25" (6.4 mm) long Stainless Steel Screws termination, Slow Rate 1 pulse per second, Piezoelectric Alarm, RoHS Compliant		<ul style="list-style-type: none"> ◆ Reliable Solid State Piezoelectric Technology ◆ Corrosion resistant Stainless Steel Diaphragm ◆ Flame Retardant Plastic ◆ Extended storage temperature ◆ Hermetically Sealed Alarm ◆ Water Proof, NEMA 3R, 4X, or 12 with Gasket (not supplied) ◆ RoHS, Lead Free Compliance ◆ ISO 9001:2008 & ISO-TS 16949:2009 Certified 					
SPECIFICATIONS							
Operating Mode	Extra Loud, Slow Intermittent or Continuous Tones			Pulse Rate	1 ± 10% Pulse per Second		
Operating Voltage	5 to 15 Vdc	Nominal Operating Voltage	12 Vdc	Operating Frequency	2,900 ± 500 Hz.		
Typical Loudness	At 5 Vdc	90 ± 5 dB(A)	At 12 Vdc	102 ± 4 dB(A)	At 15 Vdc	103 ± 3 dB(A)	
	SPL is measured at 30 cm, 25°C, Sound Level meter # 2240, Type 2, Fast Response, A-Weighted						
Typical Operating Current	10 mA at 5 Vdc		35 mA at 12 Vdc		40 mA at 15 Vdc		
Operating Temperature	-30°C to +65°C		Storage Temperature	-40°C to +100°C			
Surge Voltage	20% over maximum Operating Voltage for less than 5 minutes						
Materials	Alarm Case	Plastic, "A" Case, NORYL™, PX9406 or equal, flame retardant UL 94-V0, Black					
	Diaphragm	Stainless Steel 304					
	Encapsulation	Silicon Potting covering SMD components topped with 2 parts epoxy potting, Black					
	Termination	Three, 0.25 (6.4 mm) Quick Connect Blades, 0.032Ø (0.8Ø mm) Wide, Brass, Electro-Tin plated With M3 0.25" (6.4 mm) long Stainless Steel Screws.					
Physical Dimensions	Length or Diameter (L / D)	1.41" (35.8 mm) Ø	Width (W)		Height (H)	1.4" (35.7 mm)	
Approximate Weight	37 grams	With Volume Control Rotor	No	Compliance	RoHS		
Available Options	Rotor Volume Control, Water Proof Gasket, Mounting Bracket, and variety of connectors terminated on the Wire Lead ends						
RELIABILITY							
Thermal Operating Temperature Test	96 hours continuous operation at Rated Power, at Maximum Rated Operating Temperature *						
	96 hours continuous operation at Rated Power, at Minimum Rated Operating Temperature *						
Thermal Storage Temperature Test	96 hours storage at Maximum Rated Storage Temperatures *						
	96 hours storage at Minimum Rated Storage Temperatures *						
Thermal Shock Test	5 cycles of Minimum and Maximum Operating Temperature Each cycle shall be set per diagram below and is 3 hours long *						
Humidity Test	120 Hours at +60°C±2°C, 90-95% RH *						
Salt Spray	Withstand 300 hours of exposure to salt spray per ASTM B117 *						
Water & Dust Exposure	Withstands 50 cm of Water Submergence and Dust Exposure per IP-68 *						
Vibration Test	2 Hours at 1.5 mm with 10 to 55 Hz. of vibration frequency to each of 3 perpendicular direction *						
Drop Test	Dropped naturally from 1 meter height onto the surface of 10 mm wooden board, 2 directions upper and side of the part are applied *						
Termination Strength	Maximum of 15 pounds (6.8 Kg) load pull test and of 4 lb. per inch driving torque on screw						
* Reliability Test Performance	Parts should conform to original performance within ±3dB, after 3 hours of recovery and dry period						
Life Test	Intermittent	1,000 hours of a 1 minute on 4 minutes off cycle at room temperature and maximum rated Voltage					
	Continuous	250 hours continuous operation at room temperature and maximum rated Voltage					
Warranty	For a period of two (2) years from date of shipping under normal operations conditions This warranty does not apply to products damaged through misuse, abuse, improper installation, alteration, rework, or attempt to repair						



Current Draw and Loudness Vs. Input Voltage		DIMENSIONS		Units	Inches (mm)	Tolerance	0.030 (0.7)			
Typical Output Sound Level ± 4 dB(A), with Type 2 Meter										
	Input Voltage (V)		Input Current (mA)		1.125-24 UNF THREADS MAJOR D 1.118 MINOR D 1.074 PITCH D 1.094		Blades-- Brass, Electro Tin Plated 3, S.S. Screws M3, 0.25 (6.4 mm) Long MOUNTING HOLE-- 1.125" (28.6mm) DIAMETER		(+) Common (-) Continuous (-) Main Tone	
ALARM MAKING				TYPICAL MOUNTING						
On side Case:	Part Number Sound Type Operating Voltage Range / Date Code Challenge Electronics Made in China			Ring Nut	Mounting Panel	Gasket Optinal	Alarm Side View			
On Back:	Polarity Identification (when Required)									
SUBSTANCE OF VERY HIGH CONCERN (REACH) and RoHS LEAD FREE COMPLIANCE										
This product does NOT contain any of the REACH Substances of Very High Concern (SVHC), and is in compliance with European Union REACH Regulation No.1907/2006 regarding chemical substances which must be registered or disclosed.										
Cadmium (Cd) / Cadmium Compounds	≤ 100 ppm	In compliance	Poly Brominated Biphenyls (PBB)	≤ 1,000 ppm	In compliance					
Lead (Pb) / Lead Compounds	≤ 1,000 ppm	≤ 10,000 ppm (*)	Poly Brominated Diphenyl Ethers (PBDE)	≤ 1,000 ppm	In compliance					
Mercury (Hg) / Mercury Compounds	≤ 1,000 ppm	In compliance	Arsenic (As)	≤ 1,000 ppm	In compliance					
Hexavalent-Chromium (Cr6+)	≤ 1,000 ppm	In compliance								
(*) European Union Directive 2011/65/EU (RoHS Directive) of the European Parliament. And of the Council of 8 June 2011 and all subsequent amendments, The ANNEX III of the Directive Applications exempted from the restriction in Article 4(1): 7(c)-I, Electrical and electronic components containing lead in a glass or ceramic other than dielectric ceramic in capacitors, e.g. Piezoelectric devices, or in a glass or ceramic matrix compound Piezoelectric is also known as Lead Zirconate Titanate (PZT) ceramics. Piezoelectric Ceramic disc, (PZT), lead as high covalent compound in the ceramic matrix to achieve good ferroelectric properties in a wide temperature range. The best-known performances can be reached with PZT ceramics, which are a mixture of PbTiO3 and PbZrO3. The lead content, homogeneous material compound is between 58% and 68% by weight depending on the proportion of zirconium (Zr) and titanium (Ti).										
PACKAGING										
				Shipping Box MARKING		TRAY				
				Part Number		Dimensions		L	34.7 cm	
				Other PN (if required)				W	34.7 cm	
				Lot and/or Date Code				H	21.2 cm	
				Quantity		Quantity		47		
				PO Number		SHIPPING BOX				
				Net Weight		Dimensions		L	35 cm	
				Gross Weight				W	35 cm	
				Box Number of Boxes				H	22.5 cm	
				Made in China		Number of Trays		5		
						Quantity		250		
						Approximate Weight		9 Kg.		
Revision	Description						By	Date		
1-2007	Updated Specifications						Ely Zofan	1/30/2007		
2-2010	Changed formate						Ely Zofan	9/21/2010		
3-2012	Modified the Sound Pressure Specifications						Ely Zofan	5/14/2012		
4-2015	Added SubstanceE of Very High Concern & RoHS Compliance, and Extended the waranty period						Ely Zofan	1/14/2015		