




PRODUCT INFORMATION

Part #: **CE-WM530AVSS**

Revision: 3-2012

DESCRIPTION		FEATURES			
<p>Challenge Electronics WARBLE Tone, MEDIUM Loud, 5 to 30 Vdc, A style case Rear Panel Mounting in 1.125" (28.6 mm) Hole, Sound Pressure Level of 98 dB(A) at 30 Vdc at 61 cm, 2,900 Hz. Output Frequency, S two 0.25" (6.4 mm) Blades with M3 0.25" (6.4 mm) long Stainless Steel Screws termination, Slow Rate 1 cycle per second, Piezoelectric Alarm with a mechanical Volume Control, RoHS Compliant</p>		<ul style="list-style-type: none"> ◆ Reliable Solid State Piezoelectric Technology ◆ Corrosion resistant Stainless Steel Diaphragm ◆ Flame Retardant Plastic ◆ Extended storage temperature ◆ Hermetically Sealed Alarm ◆ Water Proof, NEMA 3R, 4X, or 12 with Gasket (not supplied) ◆ RoHS, Lead Free Compliance ◆ ISO 9001 Certified 			
SPECIFICATIONS					
Operating Mode	Medium Loud, Slow Warble Tone	Pulse Rate	1 ± 10% Cycle per Second		
Operating Voltage	5 to 30 Vdc	Nominal Operating Voltage	24 Vdc		
Operating Frequency	Center Frequency 2,900 ± 250 Hz.; cycles approximately ± 300 Hz. From Center Frequency				
Typical Loudness	At Minimum Voltage	85 ± 5 dB(A), at 5 Vdc, 24 inches (61 cm), 25°C			
	At Maximum Voltage	98 ± 3 dB(A), at 30 Vdc, 24 inches (61 cm), 25°C			
Volume Control	<p>Maximum Sound Pressure Level can be restricted up to 20 dB from maximum output. (Note, The Volume Control Rotor may reduce maximum loudness)</p> <p>To install, simply, push the ROTOR onto the front of alarm until it snapped in place</p> <p>To attenuate sound, while alarm is turned on, rotate the ROTOR until maximum desired sound is achieved</p>				
Typical Operating Current	At Minimum Voltage	5 mA at 5 Vdc	At Maximum Voltage	25 mA at 30 Vdc	
Operating Temperature	-30°C to +65°C		Storage Temperature	-40°C to +105°C	
Surge Voltage	20% over maximum Operating Voltage for less than 5 minutes				
Materials	Alarm Case	Plastic, "A" Case, NORYL™, PX9406 or equal, flame retardant UL 94-V0, Black			
	Diaphragm	Stainless Steel 304			
	Encapsulation	Two parts epoxy resign or silicone potting, Black			
	Termination	Two, 0.25 (6.4 mm) Quick Connect Blades, 0.032Ø (0.8Ø mm) Wide, Brass, Electro-Tin plated With M3 0.25" (6.4 mm) long Stainless Steel Screws.			
Physical Dimensions	Length or Diameter (L / D)	1.46" (37.1 mm) Ø	Width (W)	Height (H)	1.46" (37.1 mm)
Approximate Weight	39 grams	Removable Washing Label	No	Compliance	RoHS
Available Options					
RELIABILITY					
Thermal Operating Temperature Test	<p>240 hours continuous operation at Rated Power, at Maximum Rated Operating Temperature *</p> <p>240 hours continuous operation at Rated Power, at Minimum Rated Operating Temperature *</p>				
Thermal Storage Temperature Test	<p>96 hours storage at Maximum Rated Storage Temperatures *</p> <p>96 hours storage at Minimum Rated Storage Temperatures *</p>				
Thermal Shock Test	<p>5 cycles of Minimum and Maximum Operating Temperature</p> <p>Each cycle shall be set per diagram below and is 3 hours long *</p>				<p>SINGLE CYCLE</p> <p>Maximum °C</p> <p>25°C</p> <p>15 30 45 60 90 120 150 180 210</p> <p>Minutes</p> <p>Minimum °C</p>
Humidity Test	120 Hours at +60°C±2°C. 90-95% RH *				
Salt Spray	Withstand exposure to salt spray per ASTM B117 for a period of 300 hours *				
Water & Dust Exposure	Withstands water submergence and dust exposure per IP-68 *				
Vibration Test	2 Hours at 1.5 mm with 10 to 55 Hz. of vibration frequency to each of 3 perpendicular direction *				
Drop Test	Dropped naturally from 1 meter height onto the surface of 10mm wooden board, 2 directions upper and side of the part are applied *				
Termination Strength	Maximum of 15 pounds (6.8 Kg) load pull test and of 4 lb. per inch driving torque on screw				
* Reliability Test Performance	Parts should conform to original performance within ±3dB, after 3 hours of recovery and dry period				
Life Test	Intermittent	1,000 hours of a 1 minute on 4 minutes off cycle at room temperature and maximum rated voltage			
	Continuous	250 hours continuous operation at maximum rated Voltage and maximum Operating Temperatures			
Warranty	For a period of one (1) year from date of shipping under normal operations conditions This warranty does not apply to products damaged through misuse, abuse, improper installation, alteration, rework, or attempt to repair				



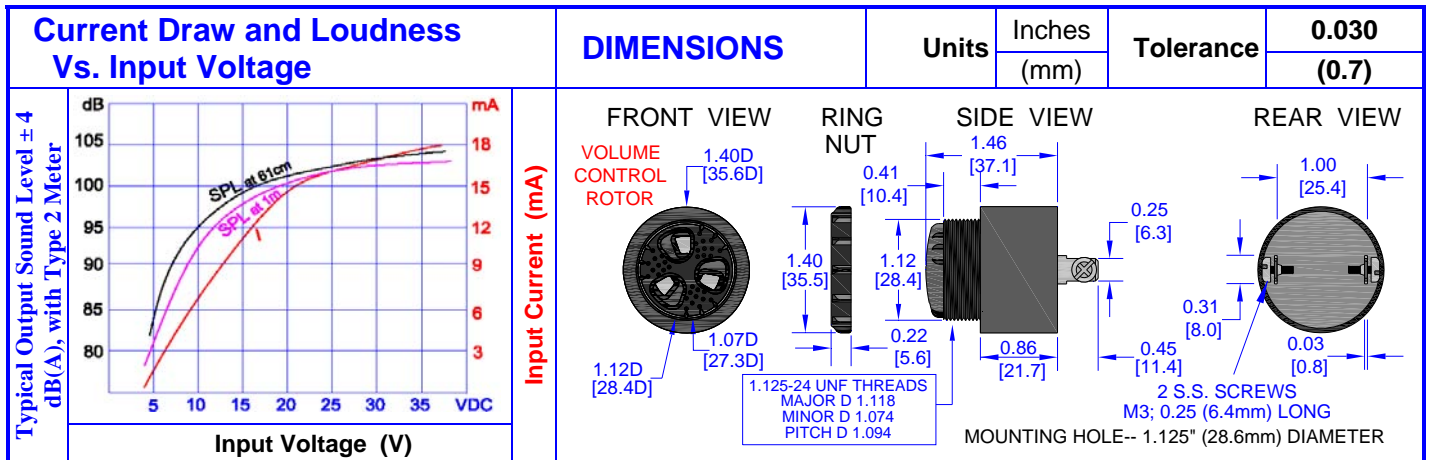

PACKAGING		MARKING	TRAY													
ONE TRAY: 	TWO BUNDLE 	Bundle	Dimensions	X1 34.7 cm												
ONE BUNDLE: 	SHIPPING BOX 	Customer PN		Y1 34.7 cm												
TOP COVER 		Other PN if required		Z1 21.2 cm												
<table border="1"> <tr> <td>ITEM:</td> <td>MADE IN CHINA</td> </tr> <tr> <td>C/NO:</td> <td></td> </tr> </table>		ITEM:	MADE IN CHINA	C/NO:		Quantity	Quantity	42								
ITEM:	MADE IN CHINA															
C/NO:																
<table border="1"> <tr> <td>MODEL</td> <td>PCS</td> </tr> <tr> <td>QTY</td> <td></td> </tr> <tr> <td>N.W</td> <td>KG</td> </tr> <tr> <td>G.W</td> <td>KG</td> </tr> <tr> <td>SIZE</td> <td></td> </tr> <tr> <td>LOT NO</td> <td></td> </tr> </table>		MODEL	PCS	QTY		N.W	KG	G.W	KG	SIZE		LOT NO		Lot and/or Date Code	BUNDLE	
MODEL	PCS															
QTY																
N.W	KG															
G.W	KG															
SIZE																
LOT NO																
<table border="1"> <tr> <td>6</td> <td>↑↑</td> </tr> <tr> <td>↑↑</td> <td></td> </tr> <tr> <td>↑↑</td> <td></td> </tr> </table>		6	↑↑	↑↑		↑↑		Bundle Number	X2	cm						
6	↑↑															
↑↑																
↑↑																
<table border="1"> <tr> <td>↑↑</td> <td></td> </tr> <tr> <td>↑↑</td> <td></td> </tr> </table>		↑↑		↑↑		Shipping Box	Dimensions	Y2 cm								
↑↑																
↑↑																
<table border="1"> <tr> <td>↑↑</td> <td></td> </tr> <tr> <td>↑↑</td> <td></td> </tr> </table>		↑↑		↑↑		Customer Part Number	Z2	cm								
↑↑																
↑↑																
<table border="1"> <tr> <td>↑↑</td> <td></td> </tr> <tr> <td>↑↑</td> <td></td> </tr> </table>		↑↑		↑↑		Other PN (if required)	Quantity									
↑↑																
↑↑																
<table border="1"> <tr> <td>↑↑</td> <td></td> </tr> <tr> <td>↑↑</td> <td></td> </tr> </table>		↑↑		↑↑		Quantity	SHIPPING BOX									
↑↑																
↑↑																
<table border="1"> <tr> <td>↑↑</td> <td></td> </tr> <tr> <td>↑↑</td> <td></td> </tr> </table>		↑↑		↑↑		Lot and/or Date Code	X3	35 cm								
↑↑																
↑↑																
<table border="1"> <tr> <td>↑↑</td> <td></td> </tr> <tr> <td>↑↑</td> <td></td> </tr> </table>		↑↑		↑↑		PO Number	Dimensions	Y3 35 cm								
↑↑																
↑↑																
<table border="1"> <tr> <td>↑↑</td> <td></td> </tr> <tr> <td>↑↑</td> <td></td> </tr> </table>		↑↑		↑↑		Net Weight	Z3	22.5 cm								
↑↑																
↑↑																
<table border="1"> <tr> <td>↑↑</td> <td></td> </tr> <tr> <td>↑↑</td> <td></td> </tr> </table>		↑↑		↑↑		Gross Weighjt	Number of Bundles	1								
↑↑																
↑↑																
<table border="1"> <tr> <td>↑↑</td> <td></td> </tr> <tr> <td>↑↑</td> <td></td> </tr> </table>		↑↑		↑↑		Box Number	Quantity	250								
↑↑																
↑↑																
<table border="1"> <tr> <td>↑↑</td> <td></td> </tr> <tr> <td>↑↑</td> <td></td> </tr> </table>		↑↑		↑↑		of Number of Boxes	Approximate Weight	9 Kg.								
↑↑																
↑↑																
<table border="1"> <tr> <td>↑↑</td> <td></td> </tr> <tr> <td>↑↑</td> <td></td> </tr> </table>		↑↑		↑↑		Made in China										
↑↑																
↑↑																

The information contained herein is believed to be correct, but no guarantee or warranty, express or implied, with respect to accuracy, completeness or results is extended and no liability is assumed.
 Challenge Electronics reserves the right to make changes in any specification, data or material contained herein.