CHALLENGE ELECTRONICS

Tel: 1-800-722-8197
1-631-595-2217
Fax: 1-631-667-5484

EMAIL: sales@challelec.com
WEB: www.challengeelectronics.com
ISO 9001/14001:2015 Certified

INDICATORS • SPEAKERS • SOUND TRANSDUCERS • ENCLOSURES • MICROPHONES • BATTERY ACCESSORIES

CI12P-07T230-C-5

Former P/N: CEEB120B095-407C23P7.6LHR

Rev. 2-2018
RoHS3 & REACH
Piezoelectric Indicators

Operating Characteristics

ELECTRICAL

Rated Voltage	5.0 VDC
Operating Voltage	4.0 to 7.0 VDC
Max Current at Vmax	30 mA

ACOUSTIC

Tone Category	Continuous
Description	Steady
Center *f*	2300 ± 300 Hz
Min SPL at Vrated	85 dB
Test Conditions	10 cm

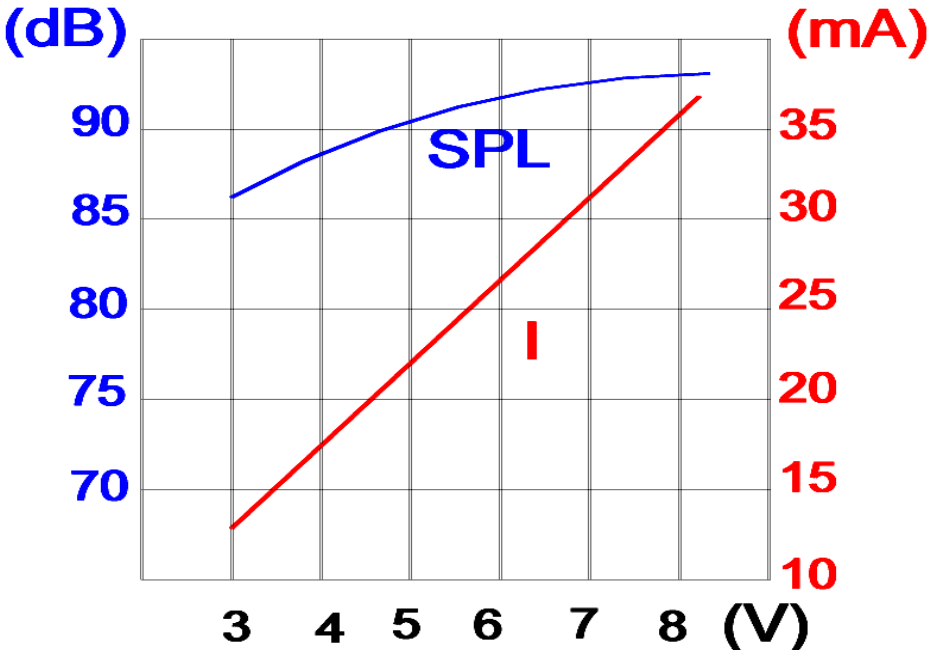

Physical Characteristics

MATERIALS

Housing	PBT

TEMPERATURE RANGES

Operating	-40 to +85 °C
Storage	-40 to +85 °C

Weight 2 g

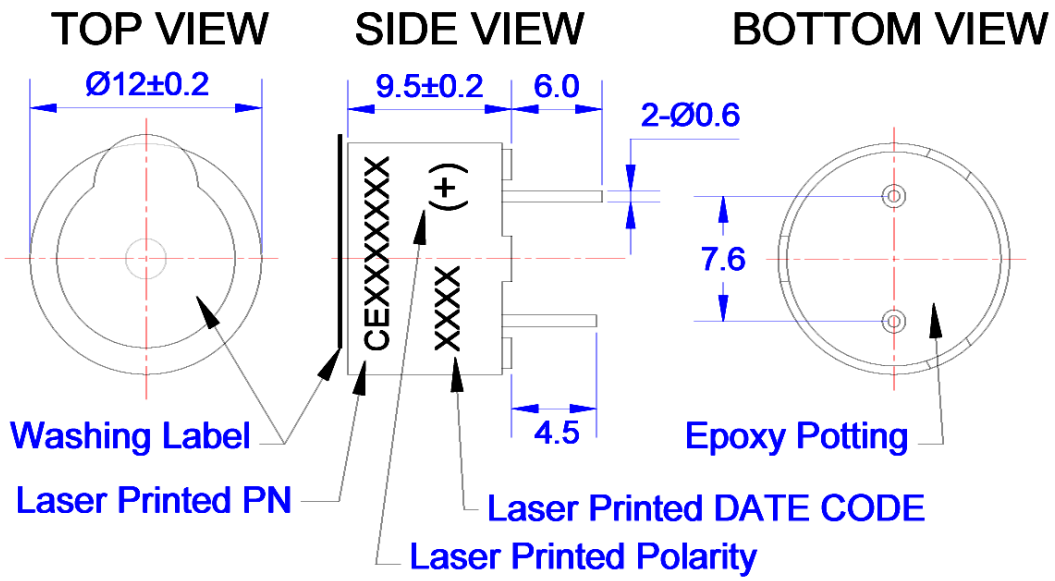

Revision	Description	By	Date
1-2014	Revise housing material to PBT	WS	2014-03-17
2-2018	Migrate to new format	YK	2018-07-12

Warranty: For a period of one (1) year from date of shipping under normal operations conditions This warranty does not apply to products damaged through misuse, abuse, improper installation, alteration, rework, or attempt to repair.

The information contained herein is believed to be correct, but no guarantee or warranty, express or implied, with respect to accuracy, completeness or results is extended and no liability is assumed. Challenge Electronics reserves the right to make changes in any specification, data or material contained herein.
©2019 Challenge Electronics, Inc. 20191024165818