

## CI13P-18W400-C-1

Former P/N: CEPB139A095-318C40W80R

Rev. 1-2019  
RoHS3 & REACH  
Piezoelectric Indicators

PHOTO  
UNAVAILABLE


### Operating Characteristics

#### ELECTRICAL

Rated Voltage	12 VDC
Operating Voltage	3 to 18 VDC
Max Current at Vmax	23 mA

#### ACOUSTIC

Tone Category	Continuous
Description	Steady
Center <i>f</i>	4000 ± 500 Hz
Min SPL at Vrated	85 dB
Test Conditions	10 cm

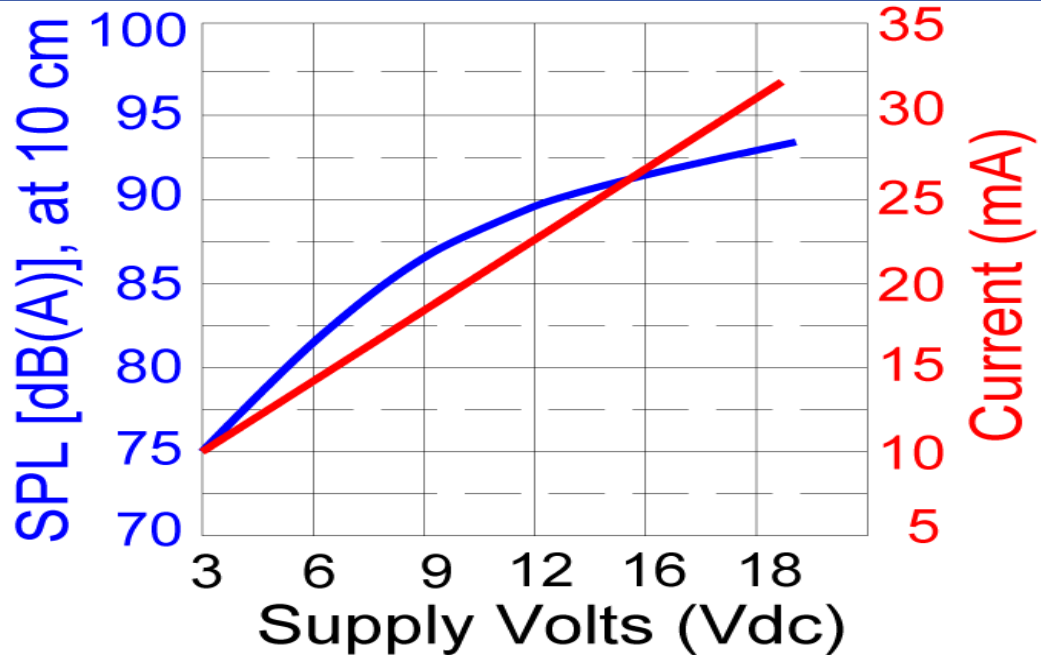

### Physical Characteristics


#### MATERIALS

Housing	NORYL
Diaphragm	Ni Alloy
Wire	UL 1007, 22 AWG

#### TEMPERATURE RANGES

Operating	-30 to +70 °C
Storage	-40 to +85 °C

Weight 1.2 g

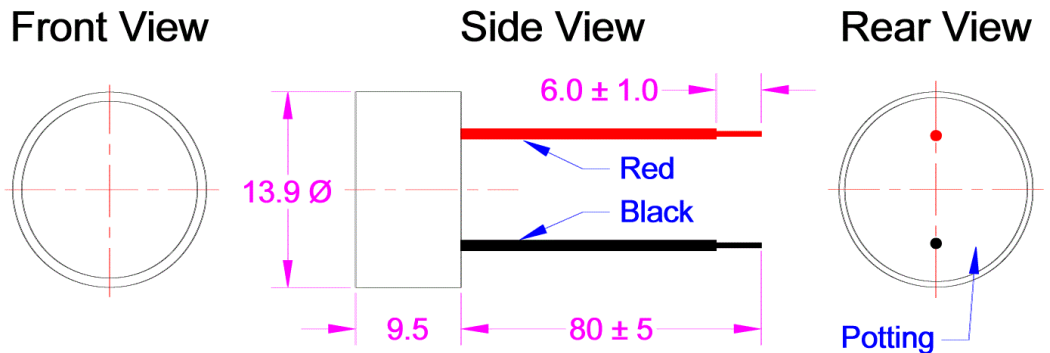

Revision	Description	By	Date
0-2017	Initial Specification Sheet	EZ	2013-07-15
1-2019	Migrate to new format	YK	2019-06-21

Warranty: For a period of one (1) year from date of shipping under normal operations conditions This warranty does not apply to products damaged through misuse, abuse, improper installation, alteration, rework, or attempt to repair.

The information contained herein is believed to be correct, but no guarantee or warranty, express or implied, with respect to accuracy, completeness or results is extended and no liability is assumed. Challenge Electronics reserves the right to make changes in any specification, data or material contained herein.