


CI16E-15T230-C-1

Former P/N: CEMB160A140-12C23PLR

Rev. 3-2019
RoHS3 & REACH
Electromagnetic Indicators




Operating Characteristics

ELECTRICAL

Rated Voltage	12 VDC
Operating Voltage	8 to 15 VDC
Max Current at Vmax	30 mA

ACOUSTIC

Tone Category	Continuous
Description	Steady
Center f	2300 \pm 300 Hz
Min SPL at Vrated	85 dB
Test Conditions	10 cm

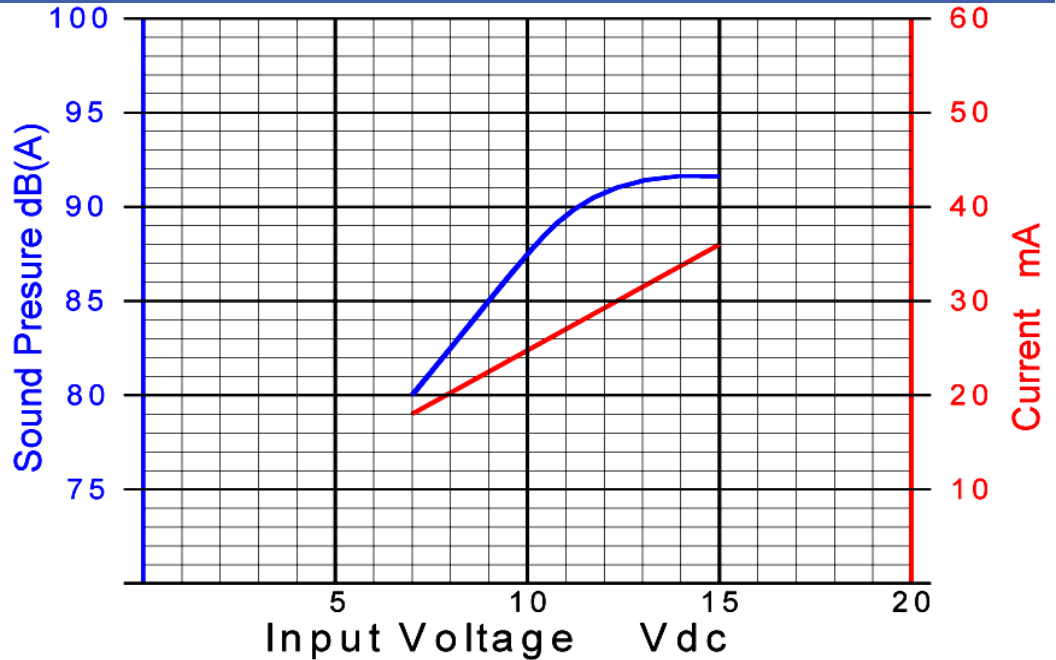

Physical Characteristics


MATERIALS

Housing	Noryl
Diaphragm	Nickel
PC Pin	Tin Plated

TEMPERATURE RANGES

Operating	-30 to +75 °C
Storage	-40 to +85 °C

Weight 6 g

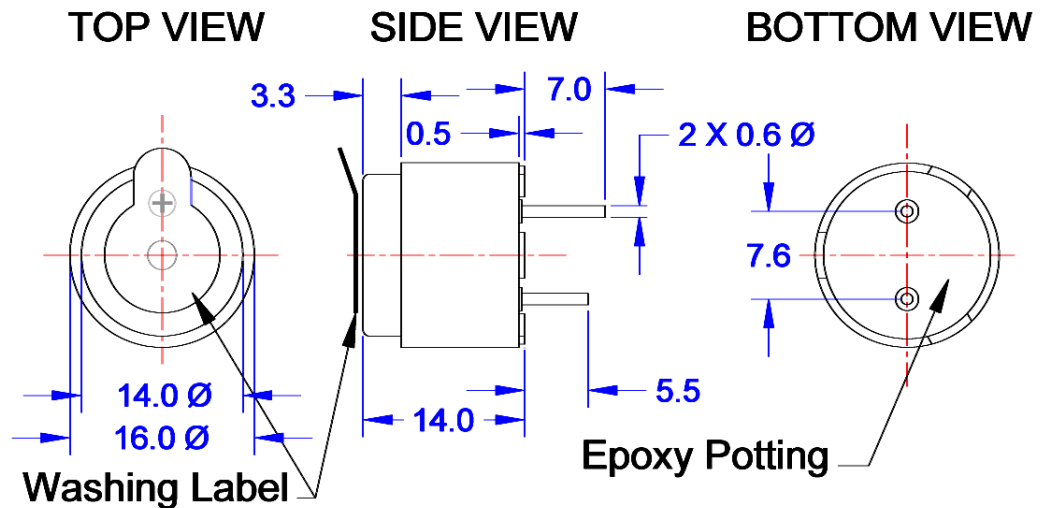

Revision	Description	By	Date
2-2018	Corrected Operating Voltage Range from 8.0 - 15.0 Vpp to 8.0 - 15.0 VDC and Rated Voltage from 12.0 Vpp to 12.0 VDC.	JL	2018-09-11
3-2019	Migrate to new format	CF	2019-06-21

Warranty: For a period of one (1) year from date of shipping under normal operations conditions This warranty does not apply to products damaged through misuse, abuse, improper installation, alteration, rework, or attempt to repair.

The information contained herein is believed to be correct, but no guarantee or warranty, express or implied, with respect to accuracy, completeness or results is extended and no liability is assumed. Challenge Electronics reserves the right to make changes in any specification, data or material contained herein.