


CI23P-15T350-C-1

 Rev. 0-2025
 RoHS3 & REACH
 Piezoelectric Indicators


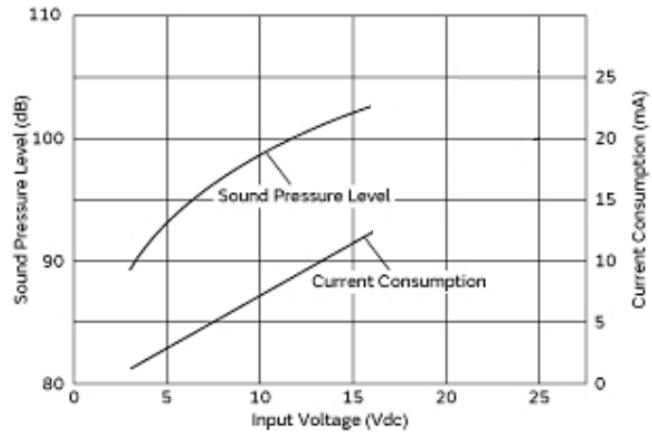
Operating Characteristics

ELECTRICAL

Rated Voltage	12 VDC
Operating Voltage	3 to 15 VDC
Max Current at Vrated	20 mA

ACOUSTIC

Tone Category	Continuous
Description	Steady
Center f	$3,500 \pm 500$ Hz
Min SPL at Vrated	85 dB
SPL Test Conditions	30 cm



Physical Characteristics


MATERIALS

Housing	Black PPO
Diaphragm	Brass
PC Pin	Tin Plated Copper

TEMPERATURE RANGES

Operating	-20 to +70 °C
Storage	-30 to +80 °C

Weight	3 g
--------	-----

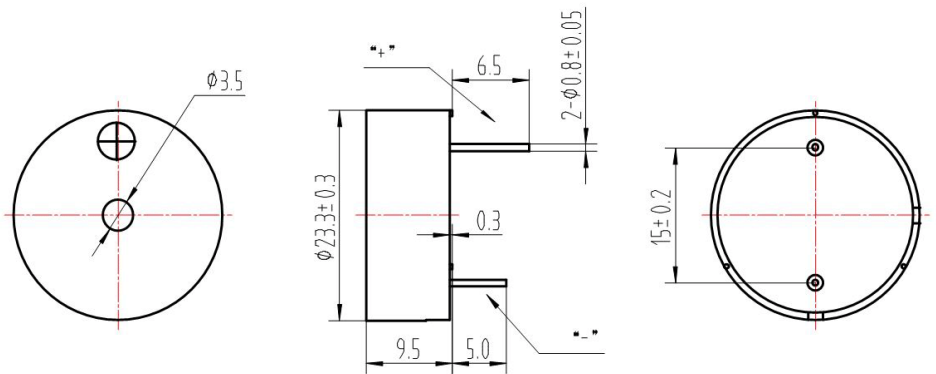
 General tolerance = ± 0.5 mm and all measurements in mm unless otherwise noted.

Revision	Description	By	Date
0-2025	Original Specification	KG	2025-11-06

Warranty: For a period of one (1) year from date of shipping under normal operations conditions. This warranty does not apply to products damaged through misuse, abuse, improper installation, alteration, rework, or attempt to repair.

The information contained herein is believed to be correct, but no guarantee or warranty, express or implied, with respect to accuracy, completeness or results is extended and no liability is assumed. Challenge Electronics reserves the right to make changes in any specification, data or material contained herein.