


CI23P-16W330-C-1X

Rev. 0-2024
RoHS3 & REACH
IPX7
Piezoelectric Indicators




Operating Characteristics

ELECTRICAL

Rated Voltage	12 VDC
Operating Voltage	6 to 16 VDC
Max Current at Vrated	30 mA

ACOUSTIC

Tone Category	Continuous
Description	Steady
Center <i>f</i>	3300 ± 500 Hz
Min SPL at Vrated	100 dB
SPL Test Conditions	10 cm

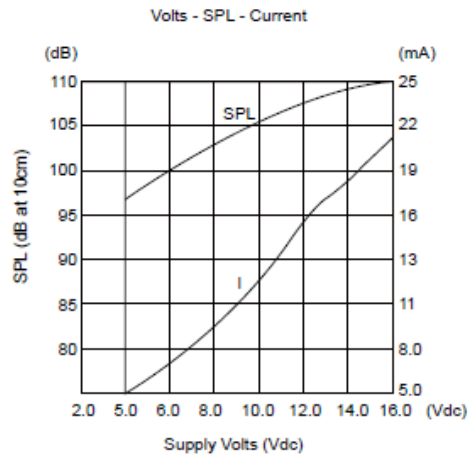

Physical Characteristics


MATERIALS

Housing	ABS
Diaphragm	Stainless Steel
Wire	UL1007, 26 AWG

TEMPERATURE RANGES

Operating	-20 to +70 °C
Storage	-30 to +80 °C

Weight 6 g

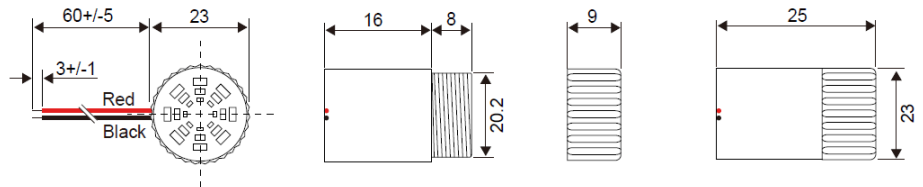

General tolerance = ±0.5 mm and all measurements in mm unless otherwise noted.

Revision	Description	By	Date
0-2024	Original Specification	KG	2024-12-09

Warranty: For a period of one (1) year from date of shipping under normal operations conditions. This warranty does not apply to products damaged through misuse, abuse, improper installation, alteration, rework, or attempt to repair. IP Rating ensures functionality after water has been drained fully from device.

The information contained herein is believed to be correct, but no guarantee or warranty, express or implied, with respect to accuracy, completeness or results is extended and no liability is assumed. Challenge Electronics reserves the right to make changes in any specification, data or material contained herein.