

INDICATORS • SPEAKERS • SOUND TRANSDUCERS • ENCLOSURES • MICROPHONES • BATTERY ACCESSORIES

CI33M-08W40-C-1

Former P/N: CEMB335Y155-408C400W120R

Rev. 3-2019
 RoHS3 & REACH
 Mechanical Indicators




Operating Characteristics

ELECTRICAL

Rated Voltage	6 VDC
Operating Voltage	4 to 8 VDC
Max Current at Vmax	25 mA

ACOUSTIC

Tone Category	Continuous
Description	Steady
Center f	400 \pm 100 Hz
Min SPL at Vrated	75 dB
Test Conditions	20 cm

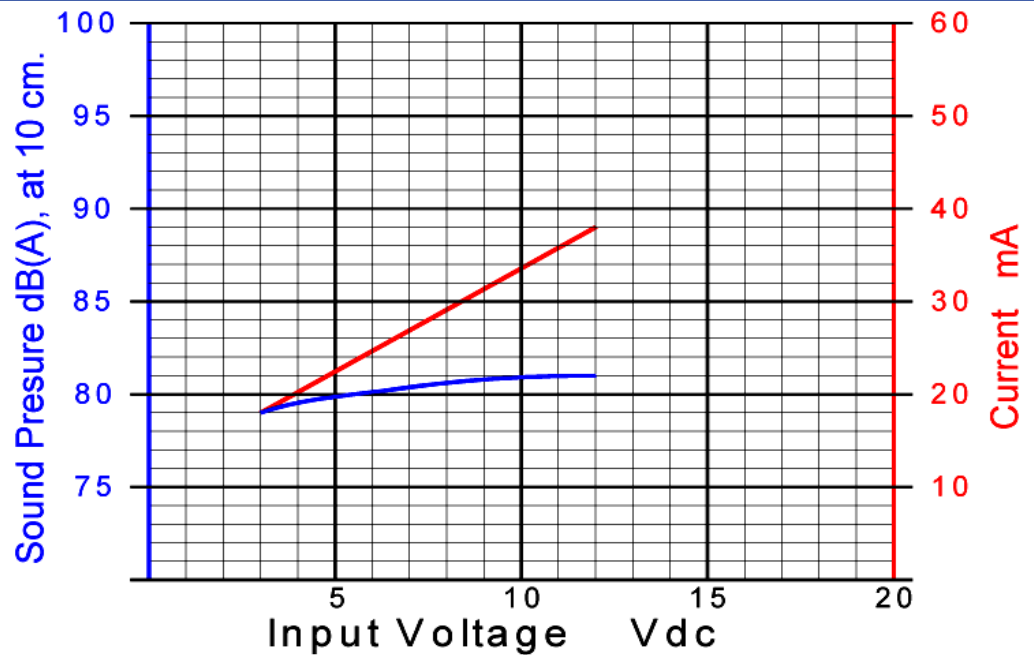

Physical Characteristics


MATERIALS

Housing	ABS
Diaphragm	Stainless Steel
Wire	UL 1095, 26 AWG

TEMPERATURE RANGES

Operating	-30 to +70 °C
Storage	-40 to +85 °C

Weight 10 g

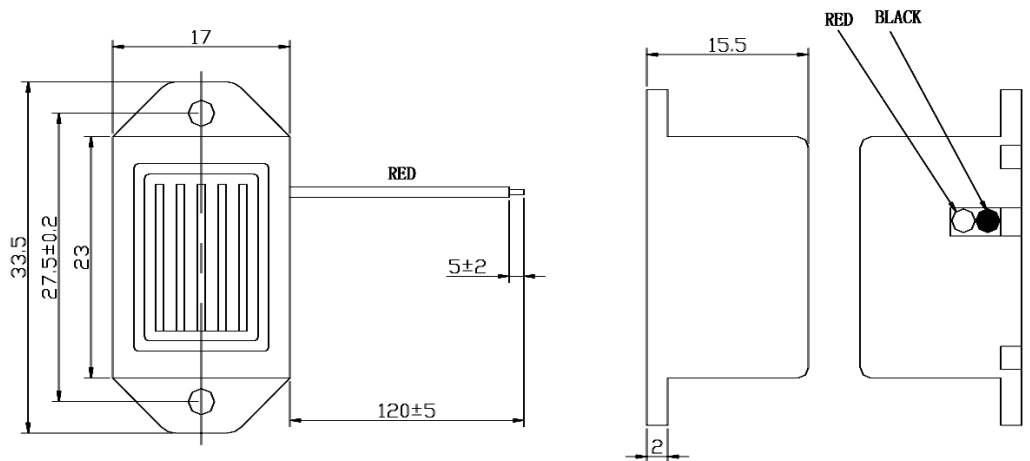

Revision	Description	By	Date
3-2019	Migrate to new format	YK	2019-06-21

Warranty: For a period of one (1) year from date of shipping under normal operations conditions This warranty does not apply to products damaged through misuse, abuse, improper installation, alteration, rework, or attempt to repair.