

INDICATORS • SPEAKERS • SOUND TRANSDUCERS • ENCLOSURES • MICROPHONES • BATTERY ACCESSORIES

## CI33M-08W40-C-1

Former P/N: CEMB335Y155-408C400W120R / CEMB335-408

Rev. 4-2020  
RoHS3 & REACH  
Mechanical Indicators




### Operating Characteristics

#### ELECTRICAL

Rated Voltage	6 VDC
Operating Voltage	4 to 8 VDC
Max Current at Vmax	25 mA

#### ACOUSTIC

Tone Category	Continuous
Description	Steady
Center <i>f</i>	400 ± 100 Hz
Min SPL at Vrated	75 dB
Test Conditions	20 cm

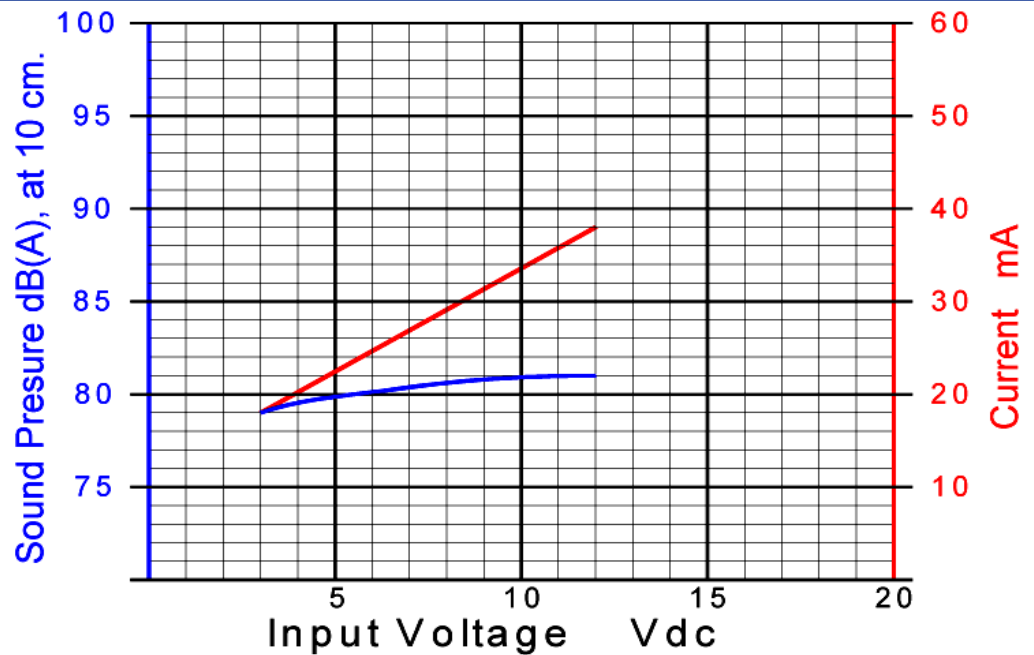

### Physical Characteristics

#### MATERIALS


Housing	ABS
Diaphragm	Stainless Steel
Wire	UL 1095, 26 AWG

#### TEMPERATURE RANGES

Operating	-30 to +70 °C
Storage	-40 to +85 °C

Weight	10 g
--------	------

Tolerance: ±0.5mm

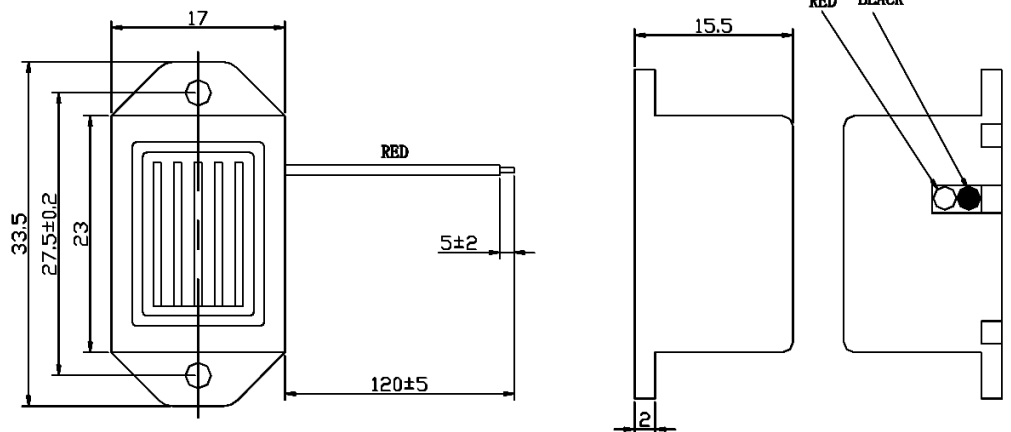

All Measurements are mm unless noted otherwise.

Revision	Description	By	Date
3-2019	Migrate to new format	YK	2019-06-21
4-2020	Added abbreviated former PN. Added general tolerance.	JL	2020-11-05

Warranty: For a period of one (1) year from date of shipping under normal operations conditions This warranty does not apply to products damaged through misuse, abuse, improper installation, alteration, rework, or attempt to repair.

The information contained herein is believed to be correct, but no guarantee or warranty, express or implied, with respect to accuracy, completeness or results is extended and no liability is assumed. Challenge Electronics reserves the right to make changes in any specification, data or material contained herein.