

CI35P-28E290-P-1X

Rev. 0-2023
RoHS3 & REACH
IP68
Piezoelectric Indicators




Operating Characteristics

ELECTRICAL

Rated Voltage	24 VAC/DC
Operating Voltage	6 to 28 VAC/DC
Max Current at Vrated	50 mA

ACOUSTIC

Tone Category	Pulsating
Description	Intermittent
Center f	2900 \pm 250 Hz
Pulse f	3.2 Hz \pm 20 %
Min SPL at Vrated	100 dB
Test Conditions	10 cm

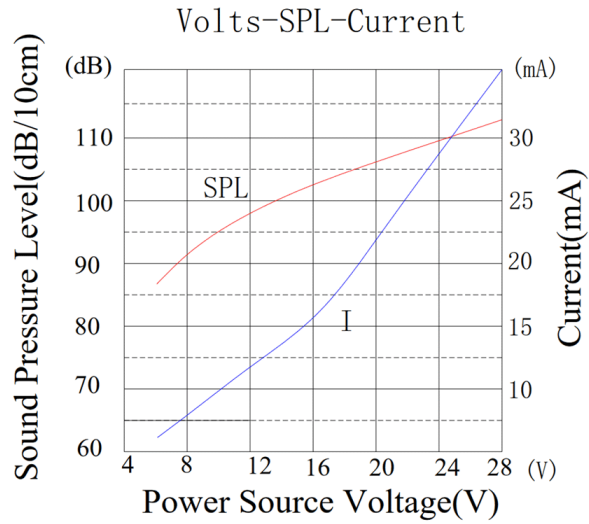

Physical Characteristics


MATERIALS

Housing	Black Noryl 94V0
Diaphragm	Stainless Steel
Terminal	Brass

TEMPERATURE RANGES

Operating	-30 to +85 °C
Storage	-40 to +85 °C

Weight 22 g

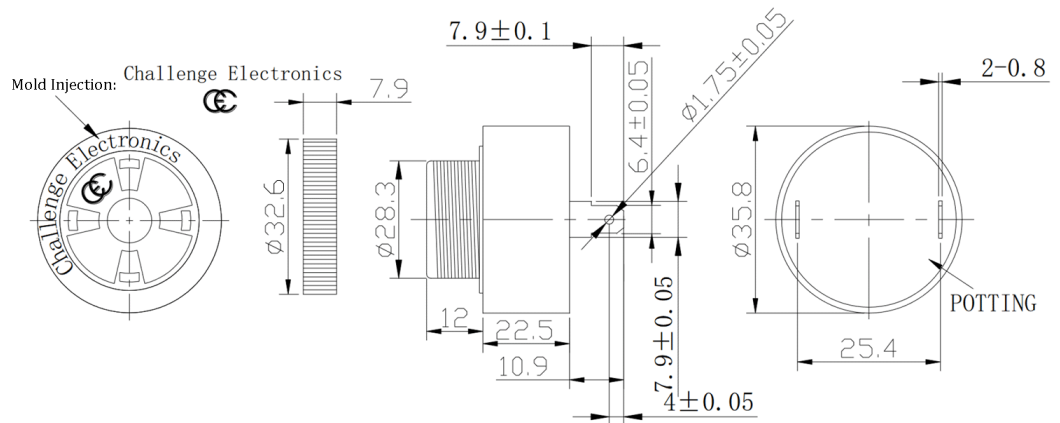

General tolerance = ± 0.5 mm and all measurements in mm unless otherwise noted.

Revision	Description	By	Date
0-2023	Original Specification.	SK	2023-12-04

Warranty: For a period of one (1) year from date of shipping under normal operations conditions. This warranty does not apply to products damaged through misuse, abuse, improper installation, alteration, rework, or attempt to repair. IP Rating ensures functionality after water has been drained fully from device.

The information contained herein is believed to be correct, but no guarantee or warranty, express or implied, with respect to accuracy, completeness or results is extended and no liability is assumed. Challenge Electronics reserves the right to make changes in any specification, data or material contained herein.