

CI35P-30E240-P-23X

Rev. 2-2020
RoHS3 & REACH
IP67 & JDM H31
Piezoelectric Indicators




Operating Characteristics

ELECTRICAL

Rated Voltage	12 VDC
Operating Voltage	6 to 30 VDC
Max Current at Vmax	80 mA

ACOUSTIC

Tone Category	Pulsating
Description	Decaying SPL
Center <i>f</i>	2400 ± 300 Hz
Pulse <i>f</i>	1 Hz ± 10 %
Min SPL at Vmin	75 dB
Min SPL at Vmax	90 dB
Test Conditions	61 cm

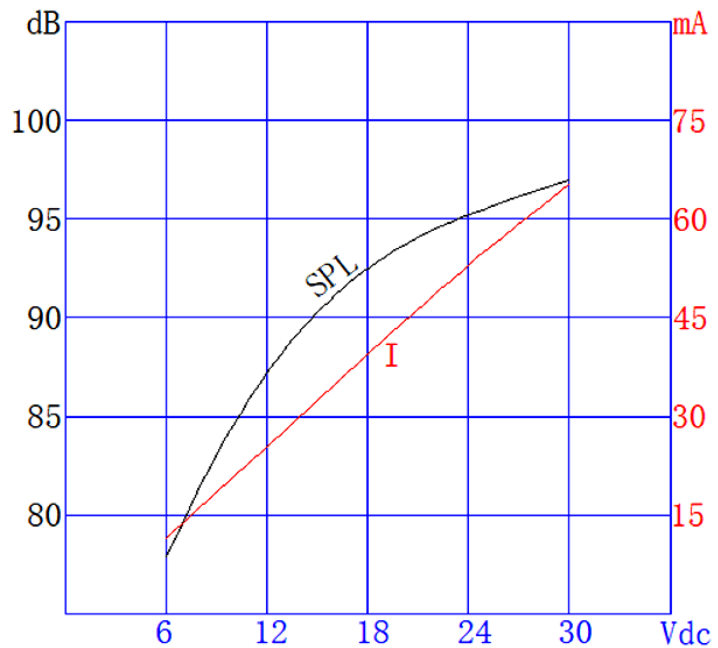

Physical Characteristics

MATERIALS


Housing	MPPO
Diaphragm	Stainless Steel
Contact	Brass, Tin-plated

TEMPERATURE RANGES

Operating	-30 to +65 °C
Storage	-40 to +90 °C

Weight 25 g

Tolerance: +/-0.75mm

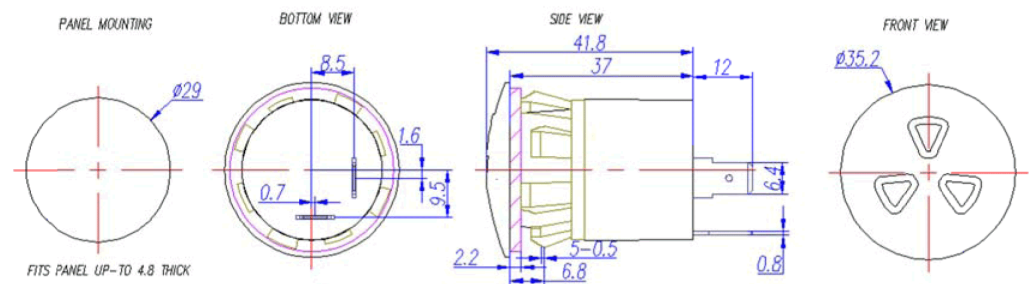

All Measurements are mm unless noted otherwise.

Revision	Description	By	Date
1-2020	Added "IP Rating ensures functionality after water has been drained fully from device." to warranty section.	JL	2020-08-10
2-2020	Added additional terminal location dimensions.	JL	2020-08-25

Warranty: For a period of two (2) years from date of shipping under normal operations conditions This warranty does not apply to products damaged through misuse, abuse, improper installation, alteration, rework, or attempt to repair. IP Rating ensures functionality after water has been drained fully from device.

The information contained herein is believed to be correct, but no guarantee or warranty, express or implied, with respect to accuracy, completeness or results is extended and no liability is assumed. Challenge Electronics reserves the right to make changes in any specification, data or material contained herein.