

INDICATORS • SPEAKERS • SOUND TRANSDUCERS • ENCLOSURES • MICROPHONES • BATTERY ACCESSORIES

## CI36P-30W290-M-6X

Former P/N: CE-BCX630AWF

Rev. 1-2019  
RoHS3 & REACH & 300 HR ASTM B117 & IP65  
Piezoelectric Indicators




### Operating Characteristics

#### ELECTRICAL

Rated Voltage	24 VDC
Operating Voltage	6 to 30 VDC
Max Current at Vmax	40 mA

#### ACOUSTIC

Tone Category	Pulsating
Description	Intermittent
Center <i>f</i>	2900 ± 500 Hz
Pulse <i>f</i>	3 Hz ± 10 %
Tone Category	Continuous
Description	Steady
Center <i>f</i>	2900 ± 500 Hz
Min SPL at Vmin	83 dB
Min SPL at Vmax	100 dB
Test Conditions	61 cm

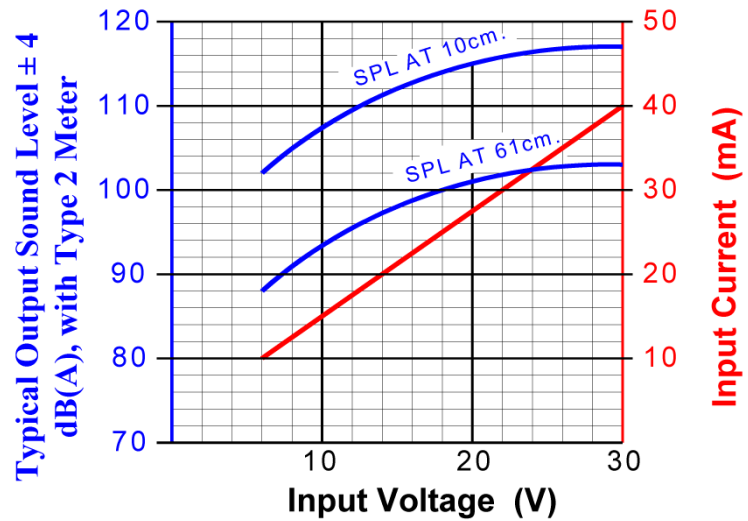

### Physical Characteristics


#### MATERIALS

Housing	Noryl PX9406
Diaphragm	Stainless Steel
Wire	GXL Automotive Copper, XPLE Insulated

#### TEMPERATURE RANGES

Operating	-30 to +65 °C
Storage	-40 to +100 °C

Weight 37 g

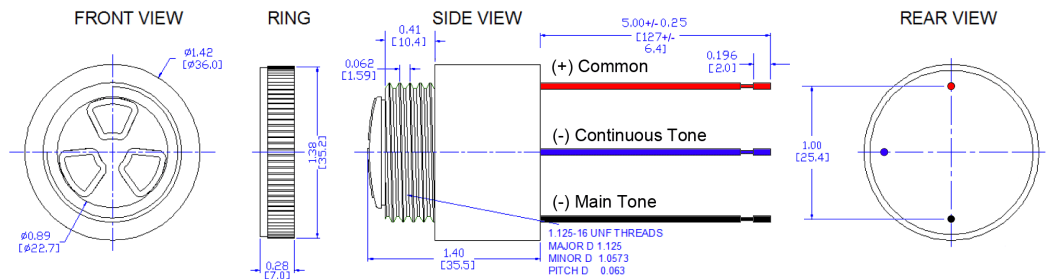

Revision	Description	By	Date
0-2014	Initial Specification Sheet	EZ	2014-06-18
1-2019	Migrate to new format	YK	2019-06-21

Warranty: For a period of two (2) years from date of shipping under normal operations conditions This warranty does not apply to products damaged through misuse, abuse, improper installation, alteration, rework, or attempt to repair.

The information contained herein is believed to be correct, but no guarantee or warranty, express or implied, with respect to accuracy, completeness or results is extended and no liability is assumed. Challenge Electronics reserves the right to make changes in any specification, data or material contained herein.

©2019 Challenge Electronics, Inc. 20190826152846