

INDICATORS • SPEAKERS • SOUND TRANSDUCERS • ENCLOSURES • MICROPHONES • BATTERY ACCESSORIES

CI41M-08W40-C-2

Former P/N: CEMB264I176-408C400W150R

Rev. 2-2019
RoHS3 & REACH
Mechanical Indicators




Operating Characteristics

ELECTRICAL

| | |
|---------------------|------------|
| Rated Voltage | 6 VDC |
| Operating Voltage | 4 to 8 VDC |
| Max Current at Vmax | 33 mA |

ACOUSTIC

| | |
|-------------------|--------------|
| Tone Category | Continuous |
| Description | Steady |
| Center <i>f</i> | 400 ± 100 Hz |
| Min SPL at Vrated | 95 dB |
| Test Conditions | 10 cm |

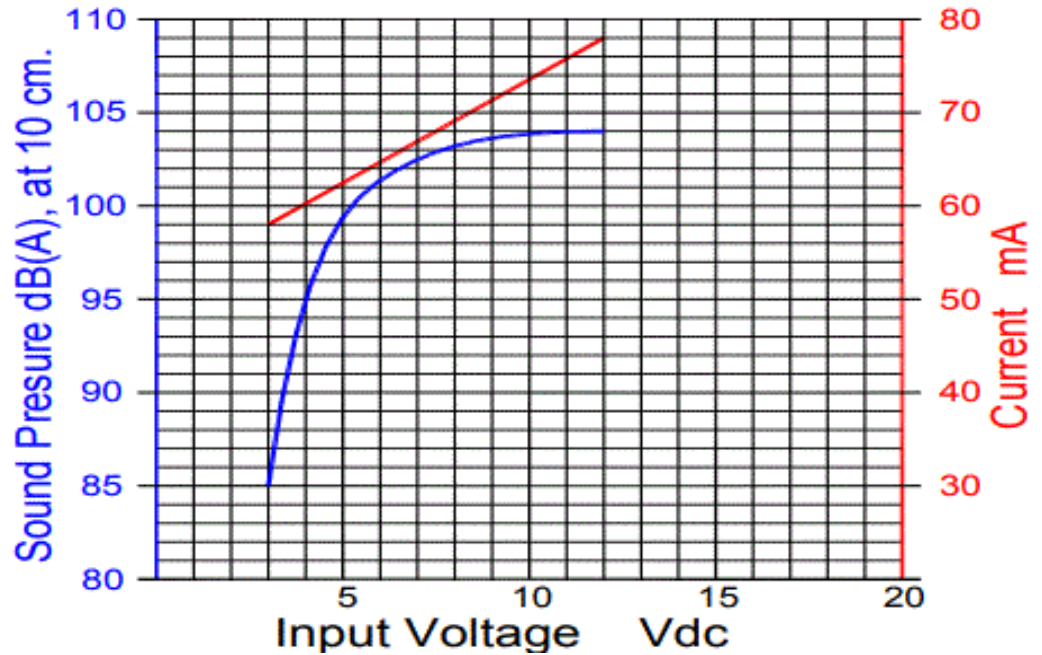

Physical Characteristics


MATERIALS

| | |
|-----------|-----------------|
| Housing | Noryl |
| Diaphragm | Stainless Steel |
| Wire | UL 1007, 28 AWG |

TEMPERATURE RANGES

| | |
|-----------|---------------|
| Operating | -20 to +60 °C |
| Storage | -30 to +70 °C |

| | |
|--------|------|
| Weight | 17 g |
|--------|------|

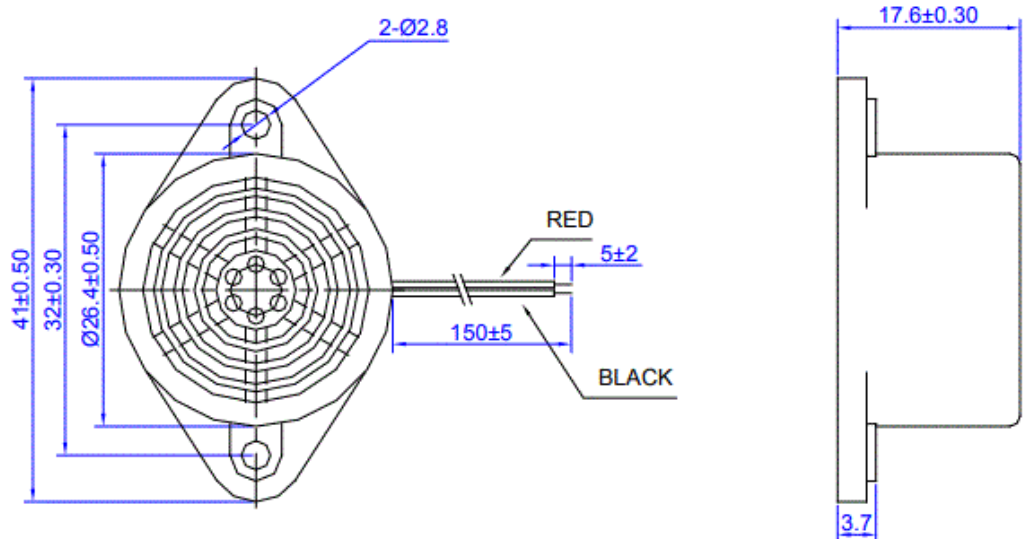

| Revision | Description | By | Date |
|----------|--|----|------------|
| 1-2013 | Revised SPL measurement distance from 30cm to 10cm | WS | 2013-09-16 |
| 2-2019 | Migrate to new format | YK | 2019-06-21 |

Warranty: For a period of one (1) year from date of shipping under normal operations conditions This warranty does not apply to products damaged through misuse, abuse, improper installation, alteration, rework, or attempt to repair.

The information contained herein is believed to be correct, but no guarantee or warranty, express or implied, with respect to accuracy, completeness or results is extended and no liability is assumed. Challenge Electronics reserves the right to make changes in any specification, data or material contained herein.