

INDICATORS • SPEAKERS • SOUND TRANSDUCERS • ENCLOSURES • MICROPHONES • BATTERY ACCESSORIES

CI51P-20W350-C-2

Former P/N: CEPB310A140-320C35WR100

 Rev. 1-2019
 RoHS3 & REACH
 Piezoelectric Indicators

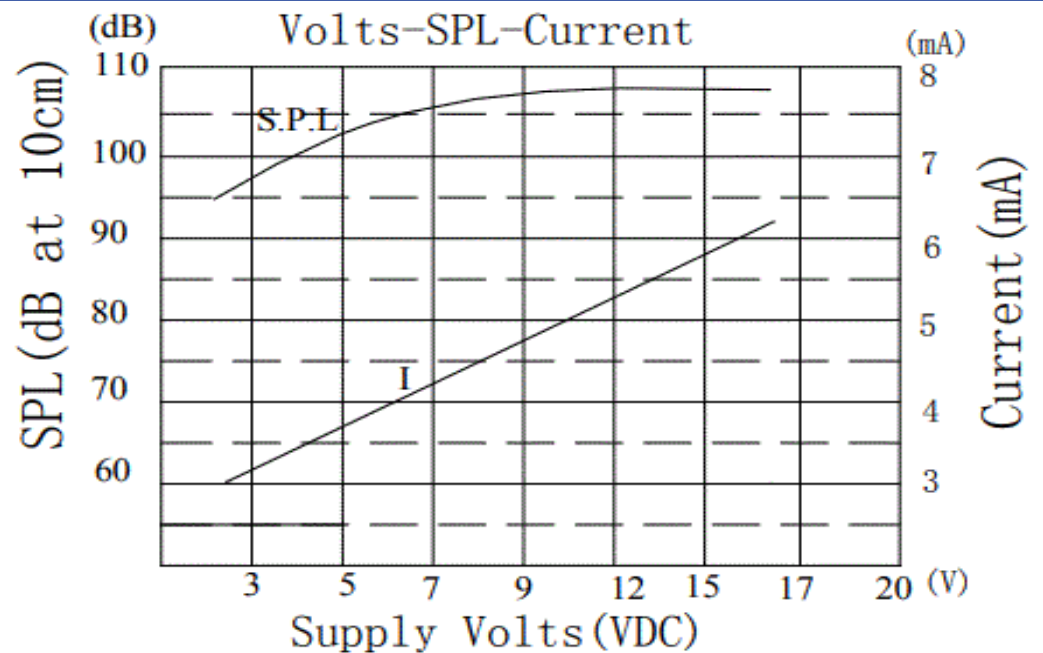

Operating Characteristics

ELECTRICAL

Rated Voltage	5 VDC
Operating Voltage	3 to 20 VDC
Max Current at Vmax	8 mA

ACOUSTIC

Tone Category	Continuous
Description	Steady
Center f	3500 \pm 500 Hz
Min SPL at Vrated	100 dB
Test Conditions	10 cm



Physical Characteristics

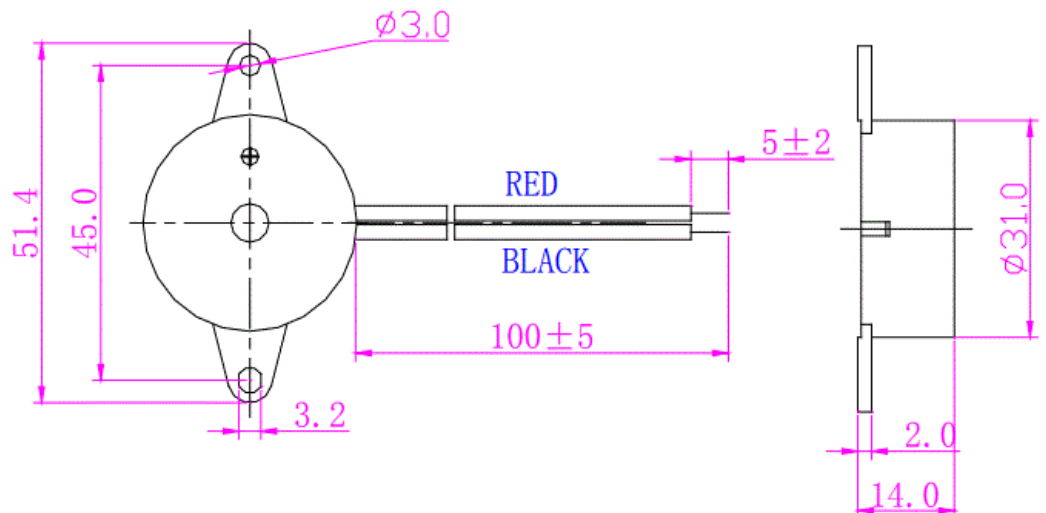
MATERIALS

Housing	ABS
Diaphragm	Brass
Wire	UL 1095, 28 AWG, Copper

TEMPERATURE RANGES

Operating	-20 to +60 °C
Storage	-30 to +70 °C

Weight 8 g



Revision	Description	By	Date
1-2019	Migrate to new format	YK	2019-06-21

Warranty: For a period of one (1) year from date of shipping under normal operations conditions This warranty does not apply to products damaged through misuse, abuse, improper installation, alteration, rework, or attempt to repair.

The information contained herein is believed to be correct, but no guarantee or warranty, express or implied, with respect to accuracy, completeness or results is extended and no liability is assumed. Challenge Electronics reserves the right to make changes in any specification, data or material contained herein.
 ©2019 Challenge Electronics, Inc. 20190826153730