

CHALLENGE ELECTRONICS

Powering Production Through Innovation



Fire Alarm Product Line

www.challengeelectronics.com

Safety and Security Products

UL Fire Alarm Standard

85 dB at 10 ft



CT23P-30S320-2
Diameter: 23 mm
Frequency: 3200 Hz

SMT
Reflow Capable



CI30P-28W325-C-1
Diameter: 30.6 mm
Frequency: 3250 Hz

DC Indicator
Plug & Play



CT32P-50T325-1
Diameter: 32.5 mm
Frequency: 3250 Hz

Compact
High Max Input Voltage




CT40P-16T325-2
Diameter: 40 mm
Frequency: 3250 Hz

Feedback Pin
Low Rated Voltage



CT43P-35W300-1
Diameter: 43 mm
Frequency: 3000 Hz

Wire Leaded
Wide Acoustic Dispersion

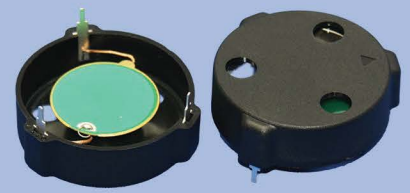

CT51P-30T250-1
Diameter: 51.5 mm
Frequency: 2500 Hz

Low Resonant Frequency
Bimorph Technology

**Smoke & Carbon Monoxide Detection, Water Leak Detection,
Residential & Commercial Security, Emergency Egress and More**



challengeelectronics.com

Available On

