

INDICATORS • SPEAKERS • SOUND TRANSDUCERS • ENCLOSURES • MICROPHONES • BATTERY ACCESSORIES

CT09E-06T273-3

Former P/N: CEET090B040-20-306-27PR

 Rev. 1-2019
 RoHS3 & REACH
 Electromagnetic Sound Transducers

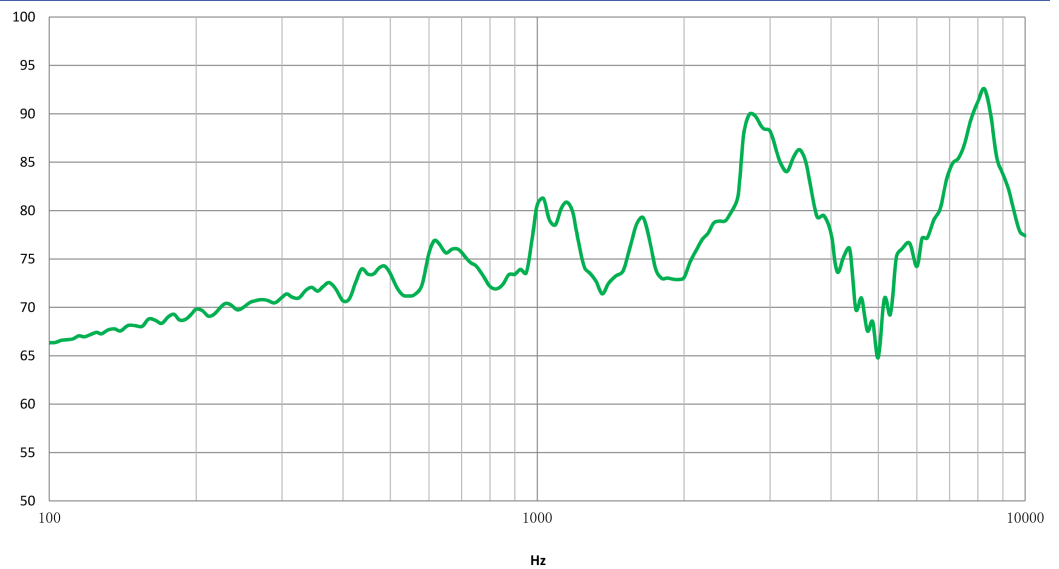

Operating Characteristics

ELECTRICAL

Rated Voltage	4.0 Vo-p
Operating Voltage	3.0 to 6.0 Vo-p
Coil Resistance	20 ± 3 Ω
Max Current at V Rated	100 mA

ACOUSTIC

Min SPL at V Rated	86 dB
Test Conditions	10 cm
f_o	2730



Physical Characteristics

MATERIAL

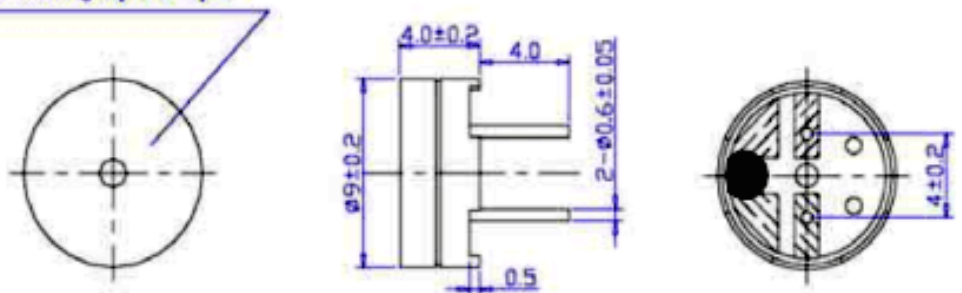
Housing	NORYL
Diaphragm	Ni-alloy
PC Pin	Tin Plated Copper

TEMPERATURE RANGES

Operating	-20 to +70 °C
Storage	-30 to +80 °C

Weight	1.0 g
--------	-------

Laser marking: P/N & D/C



Revision	Description	By	Date
0-2010	Initial Specification Sheet	EZ	2010-00-00
1-2019	Migrate to new format	JL	2019-06-21

Warranty: For a period of one (1) year from date of shipping under normal operations conditions This warranty does not apply to products damaged through misuse, abuse, improper installation, alteration, rework, or attempt to repair.

The information contained herein is believed to be correct, but no guarantee or warranty, express or implied, with respect to accuracy, completeness or results is extended and no liability is assumed. Challenge Electronics reserves the right to make changes in any specification, data or material contained herein.