

Tel: 1-800-722-8197 1-631-595-2217 Fax: 1-631-667-5484 EMAIL: sales@challelec.com WEB: www.challengeelectronics.com ISO 9001/14001:2015 Certified

INDICATORS • SPEAKERS • SOUND TRANSDUCERS • ENCLOSURES • MICROPHONES • BATTERY ACCESSORIES

CT11E-06T273-1

Former P/N: CEET110C050-30-406-27P4R

Rev. 1-2019 RoHS3 & REACH Electromagnetic Sound Transducers




Operating Characteristics

ELEC	TRICAL	
	Rated Voltage	5.0 Vo-p
	Operating Voltage	4.0 to 6.0 Vo-p
	Coil Resistance	$30 \pm 5 \Omega$
	Max Current	100 mA

ACOUSTIC

Min SPL at V Rated	85 dB
Test Conditions	10 cm
fo	2730

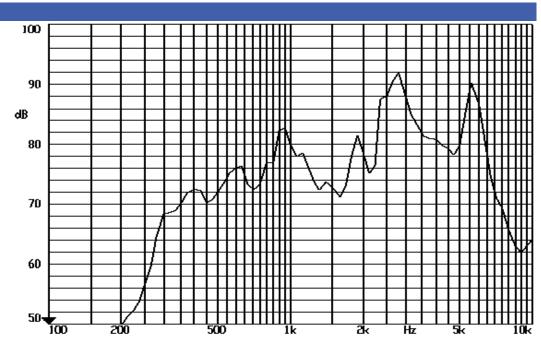

Physical Characteristics

MATERIAL

Housing Plastic, Noryl, Black

Diaphragm Ni-alloy


PC Pin Tin Plated Brass


TEMPERATURE RANGES


Operating -30 to +70 °C

Storage -40 to +85 °C

Weight 1.0 g







Revision	Description	Ву	Date
1-2019	Migrate to new format	JL	2019-06-21

Warranty: For a period of one (1) year from date of shipping under normal operations conditions This warranty does not apply to products damaged through misuse, abuse, improper installation, alteration, rework, or attempt to repair.