

INDICATORS • SPEAKERS • SOUND TRANSDUCERS • ENCLOSURES • MICROPHONES • BATTERY ACCESSORIES

## CT14E-04T200-3

Former P/N: CEET140B050-40-104-20P7.6LHR

Rev. 2-2019  
RoHS3 & REACH  
Electromagnetic Sound Transducers




### Operating Characteristics

#### ELECTRICAL

|                        |                 |
|------------------------|-----------------|
| Rated Voltage          | 3.0 Vo-p        |
| Operating Voltage      | 1.0 to 4.0 Vo-p |
| Coil Resistance        | 40 ± 6 Ω        |
| Max Current at V Rated | 35 mA           |

#### ACOUSTIC

|                    |               |
|--------------------|---------------|
| Min SPL at V Rated | 85 dB         |
| Test Conditions    | 10 cm         |
| $f_o$              | 2000 ± 200 Hz |

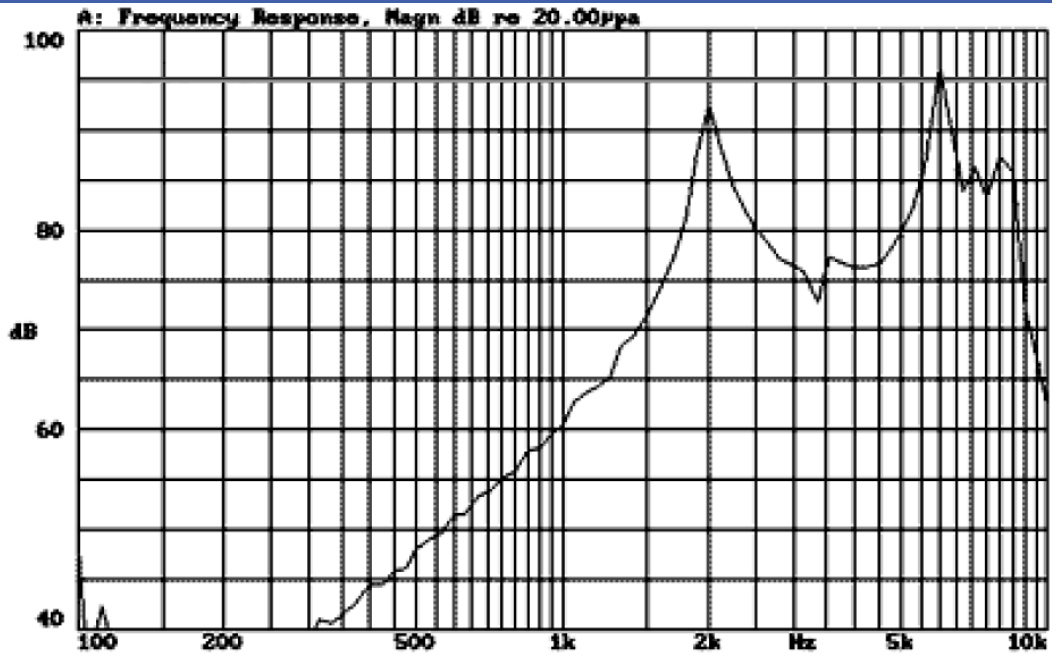

### Physical Characteristics


#### MATERIAL

|           |                   |
|-----------|-------------------|
| Housing   | Plastic           |
| Diaphragm | Ni-alloy          |
| PC Pin    | Tin Plated Copper |

#### TEMPERATURE RANGES

|           |               |
|-----------|---------------|
| Operating | -40 to +85 °C |
| Storage   | -40 to +85 °C |

|        |     |
|--------|-----|
| Weight | 2 g |
|--------|-----|

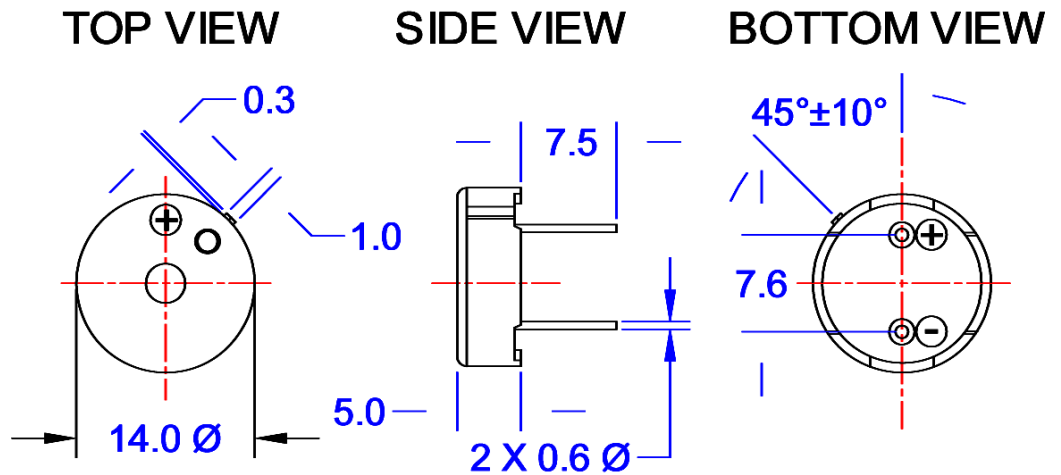

| Revision | Description           | By | Date       |
|----------|-----------------------|----|------------|
| 2-2019   | Migrate to new format | WS | 2019-06-21 |

Warranty: For a period of one (1) year from date of shipping under normal operations conditions This warranty does not apply to products damaged through misuse, abuse, improper installation, alteration, rework, or attempt to repair.