


INDICATORS • SPEAKERS • SOUND TRANSDUCERS • ENCLOSURES • MICROPHONES • BATTERY ACCESSORIES

CT09E-05T273-3

Former P/N: CET090B040-20-205-27P4HR

 Rev. 2-2018
 RoHS3 & REACH
 Electromagnetic Sound Transducers


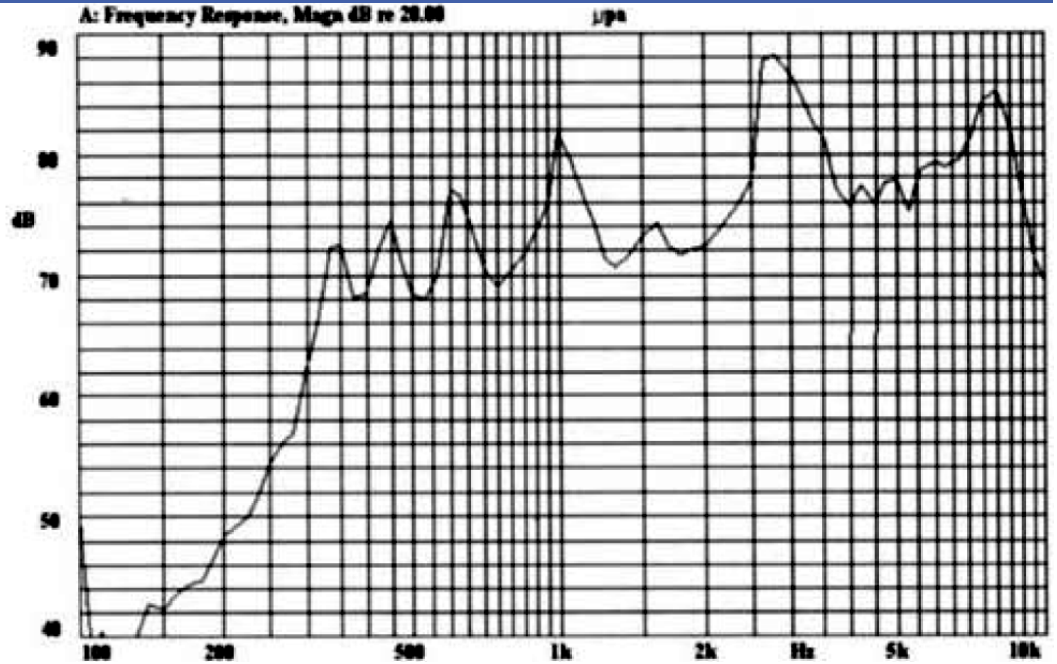
Operating Characteristics

ELECTRICAL

Rated Voltage	3.6 Vo-p
Operating Voltage	2.0 to 5.0 Vo-p
Coil Resistance	20 ± 3 Ω
Max Current at V Rated	200 mA

ACOUSTIC

Min SPL at V Rated	86 dB
Test Conditions	10 cm
f_0	2730 ± 300 Hz



Physical Characteristics


MATERIAL

Housing	Plastic, Noryl, Black
Diaphragm	Ni-alloy
PC Pin	Tin Plated Copper

TEMPERATURE RANGES

Operating	-40 to +85 °C
Storage	-40 to +85 °C

Weight	1 g
--------	-----

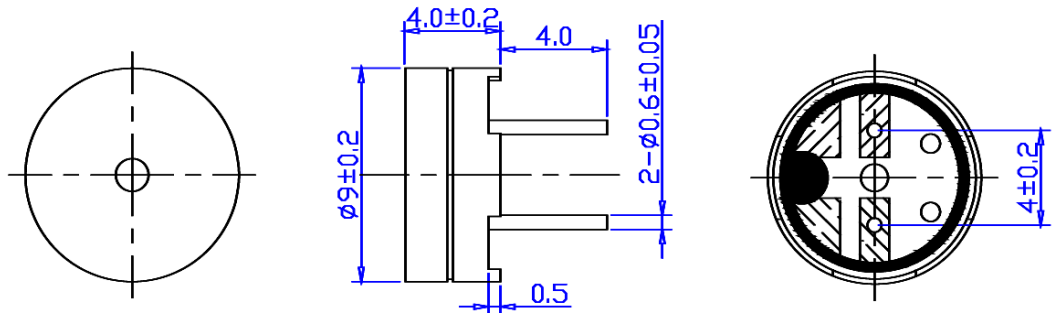

Revision	Description	By	Date
2-2018	Migrate to new format	JL	2018-12-20

Warranty: For a period of one (1) year from date of shipping under normal operations conditions This warranty does not apply to products damaged through misuse, abuse, improper installation, alteration, rework, or attempt to repair.