


INDICATORS • SPEAKERS • SOUND TRANSDUCERS • ENCLOSURES • MICROPHONES • BATTERY ACCESSORIES

CT11E-06T273-1

Former P/N: CEET110C050-30-406-27P4R

Rev. 1-2019
RoHS3 & REACH
Electromagnetic Sound Transducers




Operating Characteristics

ELECTRICAL

| | |
|------------------------|-----------------|
| Rated Voltage | 5.0 Vo-p |
| Operating Voltage | 4.0 to 6.0 Vo-p |
| Coil Resistance | 30 ± 5 Ω |
| Max Current at V Rated | 100 mA |

ACOUSTIC

| | |
|--------------------|-------|
| Min SPL at V Rated | 85 dB |
| Test Conditions | 10 cm |
| f_o | 2730 |

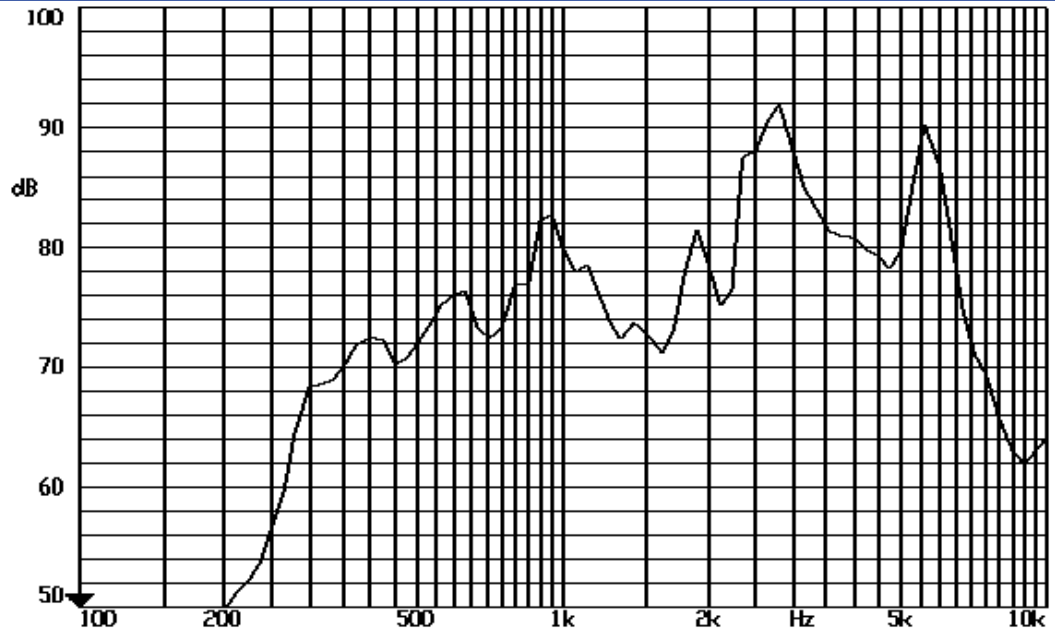

Physical Characteristics


MATERIAL

| | |
|-----------|-----------------------|
| Housing | Plastic, Noryl, Black |
| Diaphragm | Ni-alloy |
| PC Pin | Tin Plated Brass |

TEMPERATURE RANGES

| | |
|-----------|---------------|
| Operating | -30 to +70 °C |
| Storage | -40 to +85 °C |

| | |
|--------|-------|
| Weight | 1.0 g |
|--------|-------|

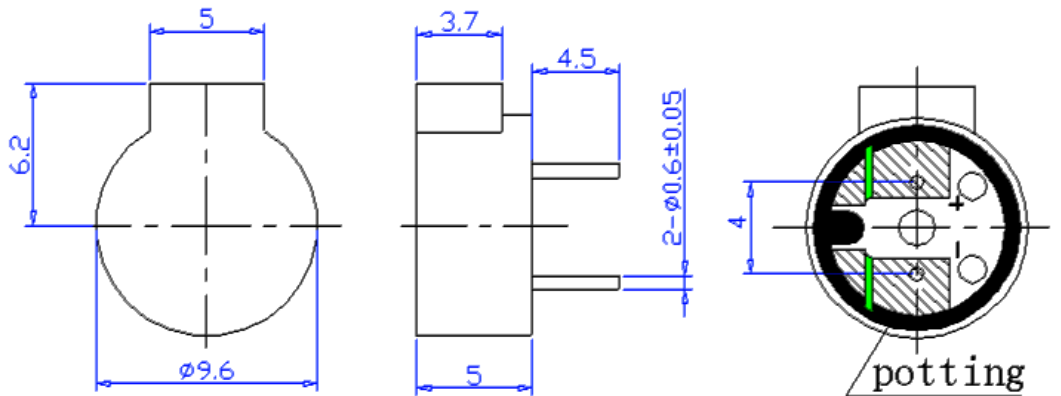

| Revision | Description | By | Date |
|----------|-----------------------|----|------------|
| 1-2019 | Migrate to new format | JL | 2019-06-21 |

Warranty: For a period of one (1) year from date of shipping under normal operations conditions This warranty does not apply to products damaged through misuse, abuse, improper installation, alteration, rework, or attempt to repair.