


INDICATORS • SPEAKERS • SOUND TRANSDUCERS • ENCLOSURES • MICROPHONES • BATTERY ACCESSORIES

CT26P-30T200-3

Former P/N: CEPT229P273-200PR

Rev. 2-2019
RoHS3 & REACH
Piezoelectric Sound Transducers




Operating Characteristics

ELECTRICAL

Rated Voltage	24 Vp-p
Max Operating Voltage	30 Vp-p
Max Current at V Rated	10 mA
Capacitance	30000 pF ± 30 % 100 Hz

ACOUSTIC

Min SPL at V Rated	100 dB
Test Conditions	10 cm
f_o	2000 ± 500 Hz

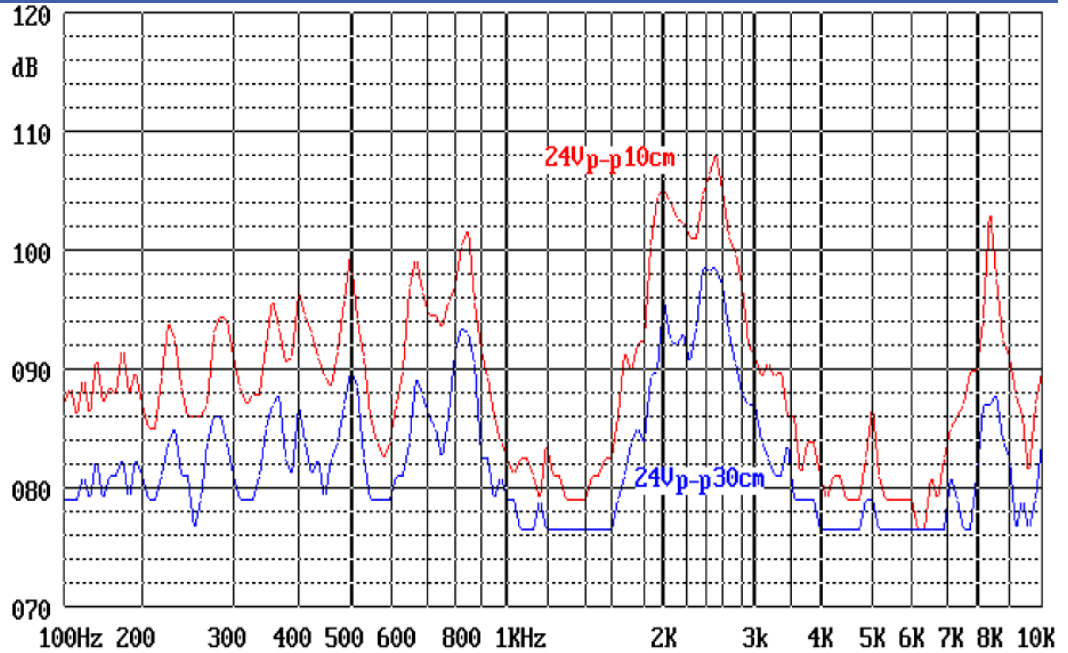

Physical Characteristics


MATERIALS

Housing	Plastic, PX9406
Diaphragm	Ni Alloy Disc N42
PC Pin	Electro-Tin Plated Brass

TEMPERATURE RANGES

Operating	-30 to +85 °C
Storage	-40 to +90 °C

Weight 10 g

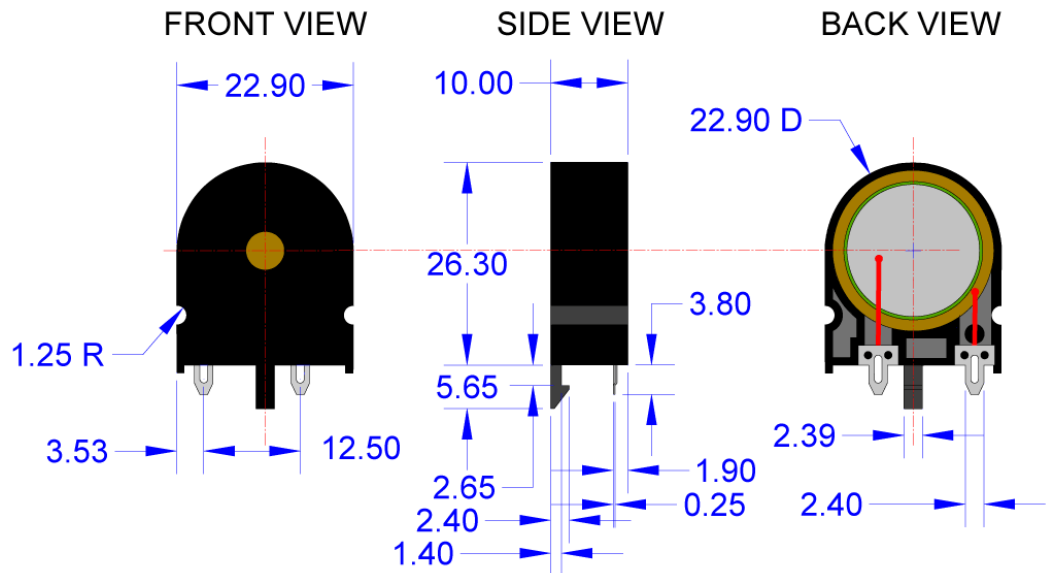

Revision	Description	By	Date
2-2019	Migrate to new format	JL	2019-06-21

Warranty: For a period of one (1) year from date of shipping under normal operations conditions This warranty does not apply to products damaged through misuse, abuse, improper installation, alteration, rework, or attempt to repair.

The information contained herein is believed to be correct, but no guarantee or warranty, express or implied, with respect to accuracy, completeness or results is extended and no liability is assumed. Challenge Electronics reserves the right to make changes in any specification, data or material contained herein.
©2020 Challenge Electronics, Inc. Pub. 20200224151604