


INDICATORS • SPEAKERS • SOUND TRANSDUCERS • ENCLOSURES • MICROPHONES • BATTERY ACCESSORIES

CT39P-12T340-1

Former P/N: CEPT390B200-612-34P145R

Rev. 1-2019
RoHS3 & REACH
Piezoelectric Sound Transducers




Operating Characteristics

ELECTRICAL

Rated Voltage	9 Vp-p
Max Operating Voltage	12 Vp-p
Max Current at V Rated	20 mA
Capacitance	28000 pF ± 30 % 1000 Hz

ACOUSTIC

Min SPL at V Rated	95 dB
Test Conditions	30 cm
f_0	3400 ± 500 Hz

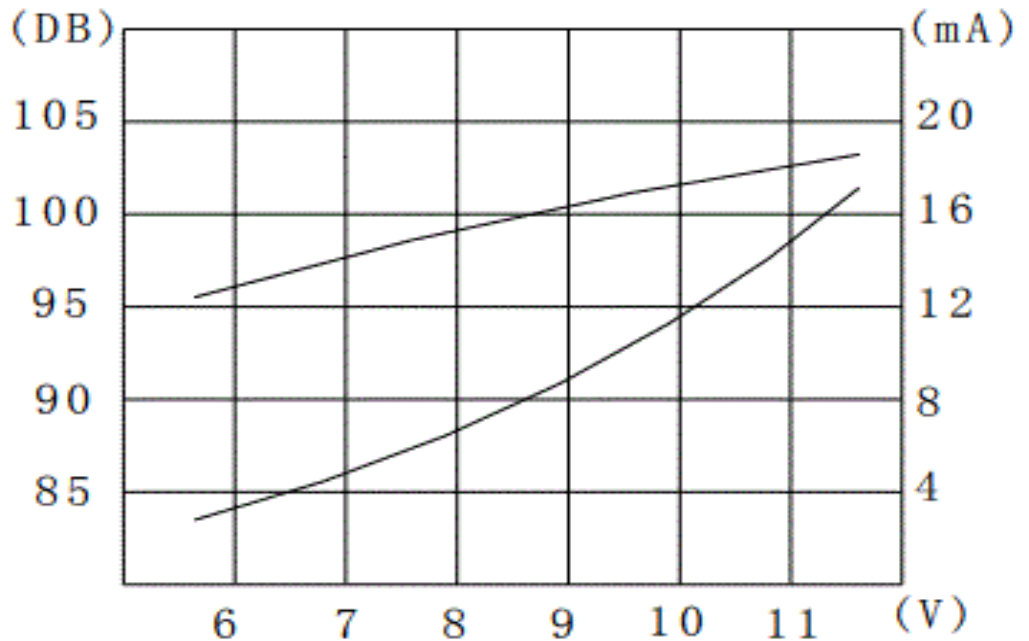

Physical Characteristics


MATERIALS

Housing	ABS757
Diaphragm	Stainless Steel
PC Pin	Tin Plated Beryllium Bronze

TEMPERATURE RANGES

Operating	-30 to +70 °C
Storage	-40 to +85 °C

Weight 12 g

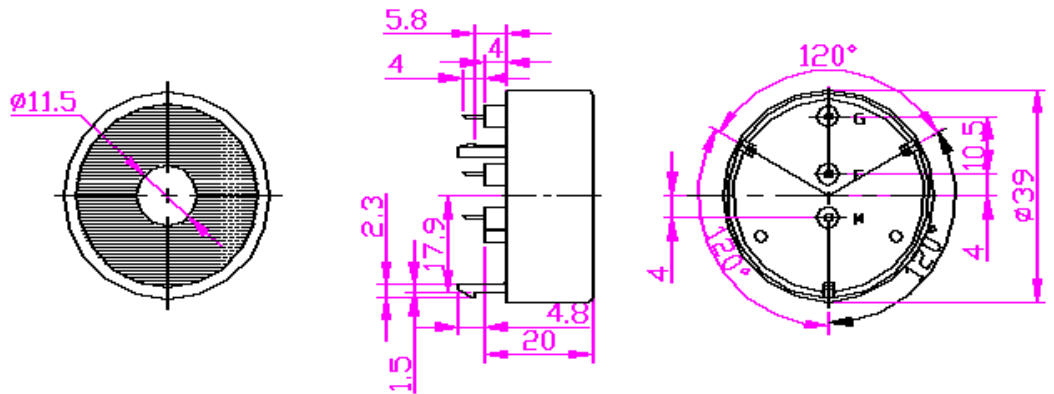

Revision	Description	By	Date
1-2019	Migrate to new format	JL	2019-06-21

Warranty: For a period of one (1) year from date of shipping under normal operations conditions This warranty does not apply to products damaged through misuse, abuse, improper installation, alteration, rework, or attempt to repair.