

INDICATORS • SPEAKERS • SOUND TRANSDUCERS • ENCLOSURES • MICROPHONES • BATTERY ACCESSORIES

CT40P-16T325-1

Former P/N: CT40PT-16325-1

 Rev. 1-2019
 RoHS3 & REACH
 Piezoelectric Sound Transducers

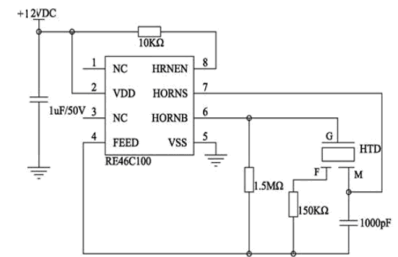
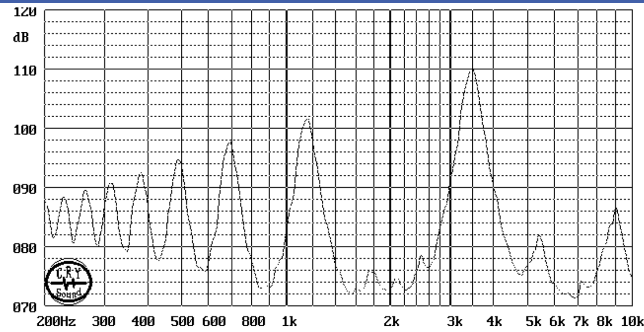

Operating Characteristics

ELECTRICAL

Rated Voltage	9 V _{o-p}
Max Operating Voltage	16 V _{o-p}
Max Current at V Rated	≤30 mA
Capacitance	26000 pF ± 30 % 100 Hz

ACOUSTIC

Min SPL at V Rated	85 dB
Test Conditions	300 cm
f _o	3250 ± 500 Hz


Test Circuit

Physical Characteristics

MATERIALS

Housing	PPO
Diaphragm	Steel
PC Pin	Copper

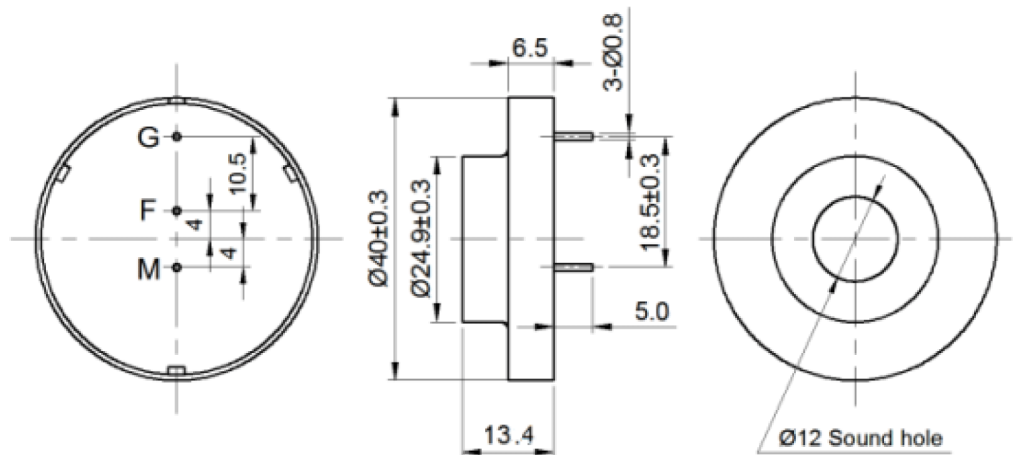
TEMPERATURE RANGES

Operating	-20 to +70 °C
Storage	-30 to +80 °C

Weight 9.2 g

UNIT: mm

Tolerance: ±0.5mm Except Specified



Revision	Description	By	Date
0-2019	Initial Specification Sheet	JL	2019-04-30
1-2019	Migrate to new format.	CF	2019-06-24

Warranty: For a period of one (1) year from date of shipping under normal operations conditions This warranty does not apply to products damaged through misuse, abuse, improper installation, alteration, rework, or attempt to repair.

The information contained herein is believed to be correct, but no guarantee or warranty, express or implied, with respect to accuracy, completeness or results is extended and no liability is assumed. Challenge Electronics reserves the right to make changes in any specification, data or material contained herein.

©2020 Challenge Electronics, Inc. Pub. 20200224152103