

CS15-00W60-04-2

Rev. 0-2026
RoHS3 & REACH
Chamber-Free Mobile Speakers



Operating Characteristics: Baffle Board

ELECTRICAL

Rated Power 0.7 W

Short Term Max Power 1 W

Impedance $8 \Omega \pm 15\%$
1,500 Hz; 0.7 W


ACOUSTIC

f_o 650 Hz $\pm 20\%$
0.7 W; 10 cm

Freq. Range 520 to 20,000 Hz

Rated SPL 800, 1,000, 1,500, 2,000 Hz;
AVG: 0.7 W; 10 cm


Distortion $< 10\%$
2,000 Hz; 0.7 W

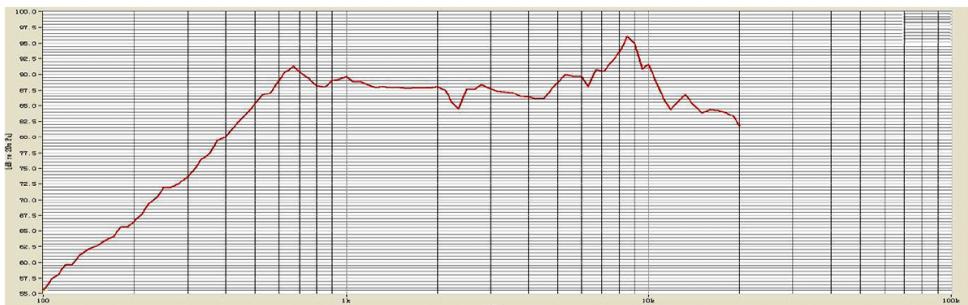

Physical Characteristics

MATERIALS

Housing	PBT
Cone	PEN
Magnet	NdFeB
Wire	UL1571, 30AWG
Connector	Molex: 51021-0200

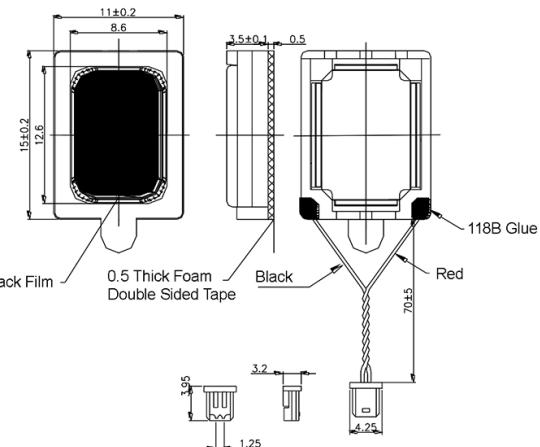

TEMPERATURE RANGES

Operating	-30 to +80 °C
Storage	-40 to +85 °C

Weight 1.5 g

General tolerance = ± 0.3 mm and all measurements in mm unless otherwise noted.

Revision	Description	By	Date
0-2026	Original Specification	KG	2026-02-10

Warranty: For a period of one (1) year from date of shipping under normal operations conditions. This warranty does not apply to products damaged through misuse, abuse, improper installation, alteration, rework, or attempt to repair.

The information contained herein is believed to be correct, but no guarantee or warranty, express or implied, with respect to accuracy, completeness or results is extended and no liability is assumed. Challenge Electronics reserves the right to make changes in any specification, data or material contained herein.