

Tel: 1-800-722-8197 1-631-595-2217 Fax: 1-631-667-5484 EMAIL: sales@challelec.com WEB: www.challengeelectronics.com ISO 9001/14001:2015 Certified

INDICATORS • SPEAKERS • SOUND TRANSDUCERS • ENCLOSURES • MICROPHONES • BATTERY ACCESSORIES

CS18-01P85-02-2

Rev. 1-2020 RoHS3 & REACH Mobile Speakers




Operating Characteristics

TRICAL	
Rated Power	1.0 W
Short Term Max Power	1.2 W
Impedance	8 Ω ± 15 % 2000 Hz; 1 W

ACOUSTIC: 1CC Sealed Enclosure

f∘	850 Hz ± 20 % 0.125 W		
Freq. Range	850 to 10000 Hz		
Rated SPL	96 ± 3 dB 800, 1000, 1200, 1500 Hz; 1.0 W; 10 cm;		
Distortion	<10 % 1000 Hz; 1 W		

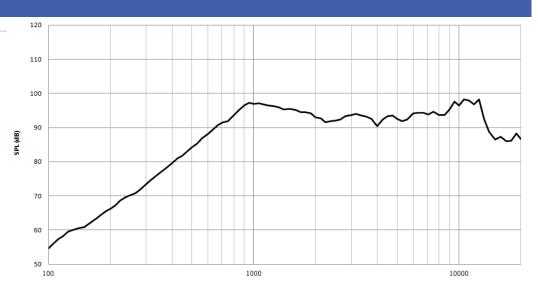

Frequency (Hz)


Physical Characteristics

Weight

IVIATE	ERIALS		
	Housing	PPA	
	Cone	PEEK	
	Magnet	3x NdFeB	
	Solder Pad	Stainless Steel	
TEM	PERATURE RAN	IGES	
TEM	PERATURE RAN	IGES -20 to +70 °C	_

1.8 g

Unit:mm \pm 0.2

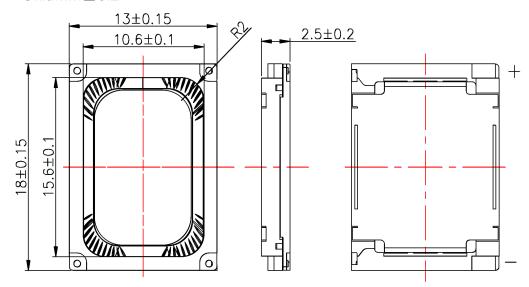

Revision	Description	Ву	Date
0-2019	Initial Specification Sheet	JL	2019-06-26
1-2020	Added magnet quantity to materials section.	JL	2020-03-20

Warranty: For a period of one (1) year from date of shipping under normal operations conditions This warranty does not apply to products damaged through misuse, abuse, improper installation, alteration, rework, or attempt to repair.