

# CS18-02P95-03-2X

Rev. 0-2025  
 RoHS3 & REACH  
 IPX7 Front Face  
 Chamber-Free Mobile Speakers




## Operating Characteristics: Baffle Board

### ELECTRICAL

Rated Power	2.0 W
Short Term Max Power	2.2 W
Impedance	8 Ω ± 15 % 2,000 Hz; 2 W

### ACOUSTIC

$f_0$	950 Hz ± 20 % 2 W; 10 cm
Freq. Range	760 to 20,000 Hz
Rated SPL	102 ± 3 dB 1,000, 1,180, 1,500, 2,000 Hz; AVG; 2 W; 10 cm
Distortion	Max 10 % 2,000 Hz; 2 W

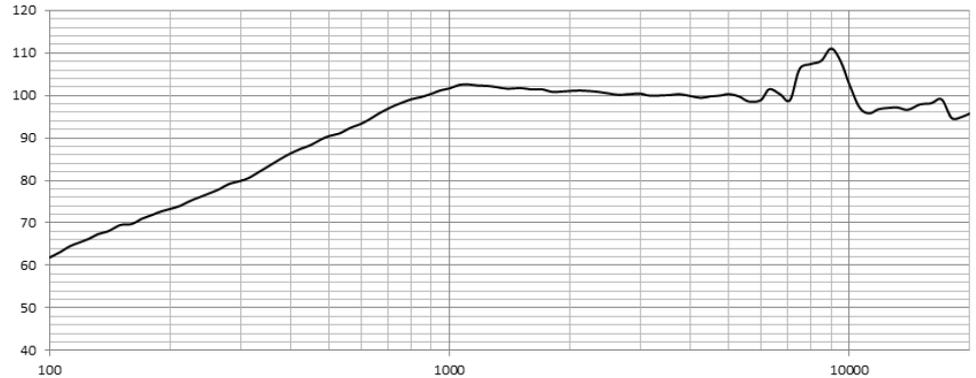

## Physical Characteristics


### MATERIALS

Housing	PPA
Cone	PEEK
Magnet	NdFeB
Solder Pads	Stainless Steel, Tin Plated

### TEMPERATURE RANGES

Operating	-20 to +60 °C
Storage	-20 to +70 °C

Weight 3.5 g

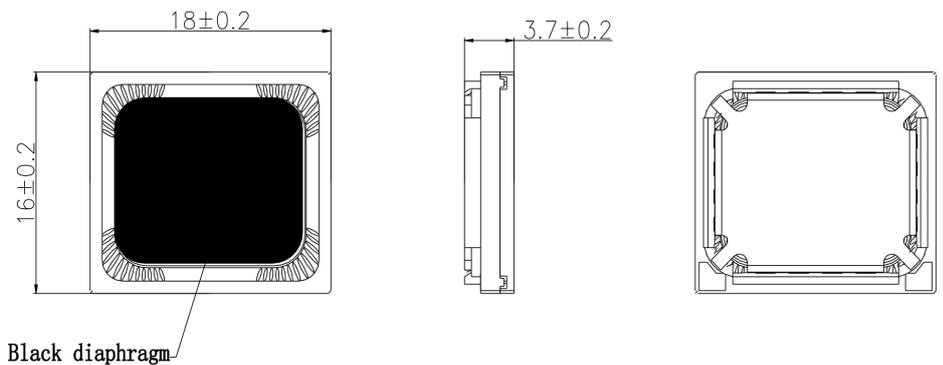

General tolerance = ±0.2 mm and all measurements in mm unless otherwise noted.

Revision	Description	By	Date
0-2025	Original Specification.	KG	2025-04-10

Warranty: For a period of one (1) year from date of shipping under normal operations conditions. This warranty does not apply to products damaged through misuse, abuse, improper installation, alteration, rework, or attempt to repair.

The information contained herein is believed to be correct, but no guarantee or warranty, express or implied, with respect to accuracy, completeness or results is extended and no liability is assumed. Challenge Electronics reserves the right to make changes in any specification, data or material contained herein.