

CS28-01W70-04-2

Former P/N: CS28W-0170-042

Rev. 1-2019
RoHS3 & REACH
Round Speakers




Operating Characteristics

ELECTRICAL

Rated Power	1.0 W
Short Term Max Power	1.8 W
Impedance	4 Ω ± 15 % 1500 Hz; 0.25 W

ACOUSTIC: Baffle Board

f_0	700 Hz ± 20 % 0.25 W
Freq. Range	700 to 10000 Hz
Rated SPL	102 ± 3 dB 800, 1000, 1200, 1500 Hz; 1.0 W; 10 cm;
Distortion	<15 % 700 - 6000 Hz; 1.0 W

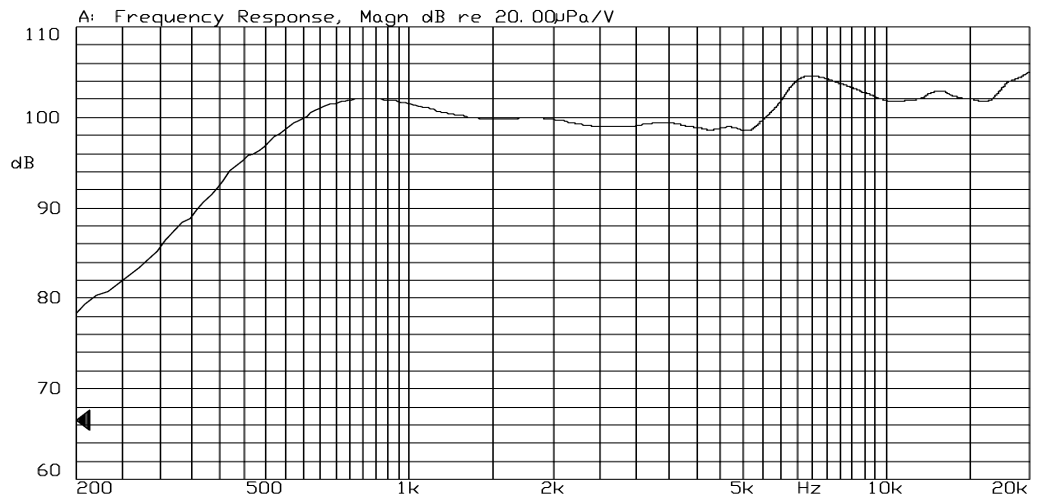

Physical Characteristics

MATERIALS


Housing	Plastic
Cone	Mylar
Magnet	NdFeB
Wire	UL 1061, 28 AWG

TEMPERATURE RANGES

Operating	-20 to +70 °C
Storage	-40 to +85 °C

Weight	8 g
--------	-----

Unless otherwise specified, tolerance: ±0.2 (unit: mm)

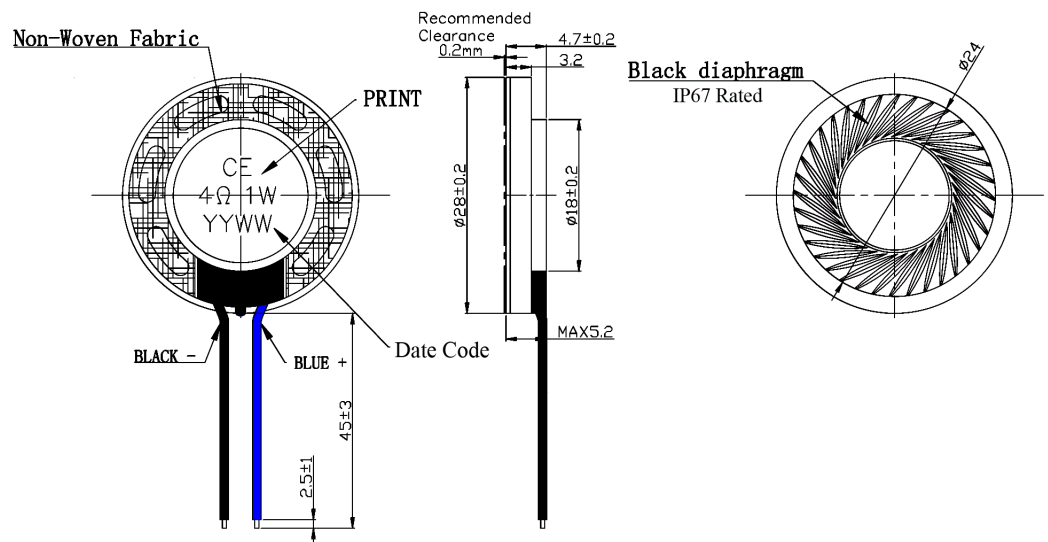

Revision	Description	By	Date
0-2019	Initial Specification Sheet	JL	2019-01-25
1-2019	Migrate to new format.	CF	2019-06-24

Warranty: For a period of one (1) year from date of shipping under normal operations conditions This warranty does not apply to products damaged through misuse, abuse, improper installation, alteration, rework, or attempt to repair.

The information contained herein is believed to be correct, but no guarantee or warranty, express or implied, with respect to accuracy, completeness or results is extended and no liability is assumed. Challenge Electronics reserves the right to make changes in any specification, data or material contained herein.