

CS28-02W57-07-1X

 Rev. 3-2021
 RoHS3 & REACH
 IP67 Front Face
 Round Speakers

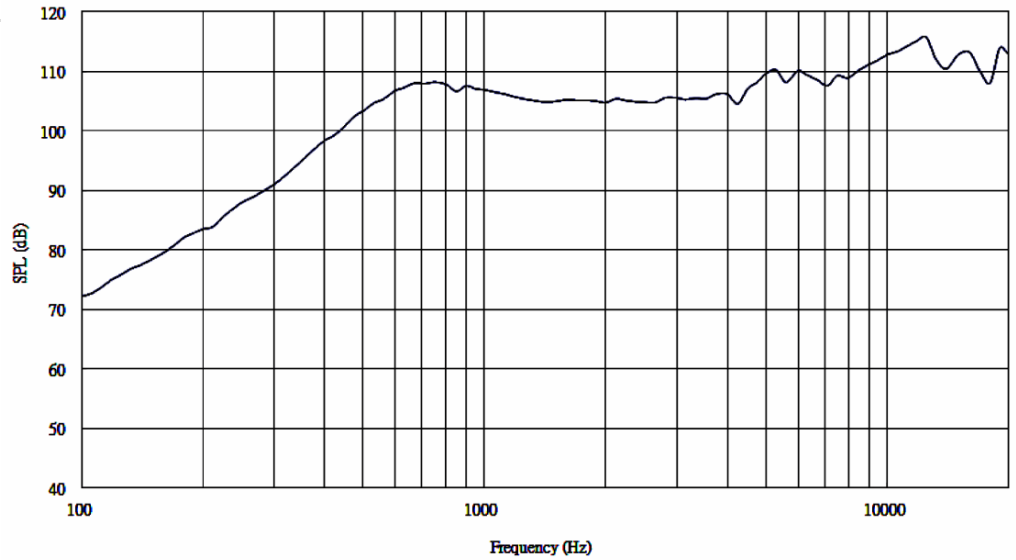

Operating Characteristics

ELECTRICAL

Rated Power	2.0 W
Short Term Max Power	3.0 W
Impedance	4 Ω ± 20 % 2000 Hz; 0.25 W

ACOUSTIC: Baffle Board

f_0	570 Hz ± 20 % 0.25 W
Freq. Range	570 to 20000 Hz
Rated SPL	103 ± 3 dB 800, 1000, 1200, 1500 Hz; 2.0 W; 10 cm;
Distortion	< 10 % 1000 Hz; 1 W



Physical Characteristics

MATERIALS

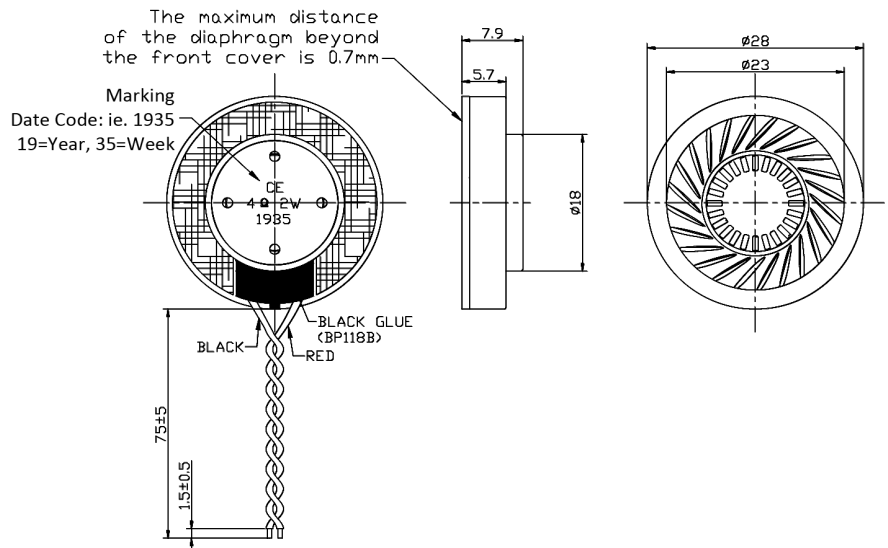
Housing	PBT
Cone	PET
Magnet	NdFeB
Wire(s)	UL 3302, 30 AWG 0.7mm OD

TEMPERATURE RANGES

Operating	-30 to +70 °C
Storage	-40 to +85 °C

Weight 10 g

Unless otherwise specified, tolerance: ± 0.3(unit:mm)



All Measurements are mm unless noted otherwise.

Revision	Description	By	Date
2-2021	Updated distortion testing condition from 2 W to 1 W.	JL	2021-01-26
3-2021	Updated housing material from plastic to PBT.	CT	2021-03-19

Warranty: For a period of one (1) year from date of shipping under normal operations conditions. This warranty does not apply to products damaged through misuse, abuse, improper installation, alteration, rework, or attempt to repair.

The information contained herein is believed to be correct, but no guarantee or warranty, express or implied, with respect to accuracy, completeness or results is extended and no liability is assumed. Challenge Electronics reserves the right to make changes in any specification, data or material contained herein.