

Tel: 1-800-722-8197 1-631-595-2217 Fax: 1-631-667-5484 EMAIL: sales@challelec.com WEB: www.challengeelectronics.com ISO 9001/14001:2015 Certified

INDICATORS • SPEAKERS • SOUND TRANSDUCERS • ENCLOSURES • MICROPHONES • BATTERY ACCESSORIES

CS28-03D25-11-1

Former P/N: CES280R110EA04PLN250TR

Rev. 1-2019 RoHS3 & REACH Round Speakers




Operating Characteristics

Rated Power	3 W
Short Term Max Power	4 W
Impedance	4 Ω ± 15 % 1000 Hz; 0.25 W



f _o	250 Hz ± 20 % 0.25 W	
Freq. Range	250 to 20000 Hz	
Rated SPL	84 ± 3 dB 500, 1000, 2000, 4000 Hz; 0.01 W; 10 cm;	
Distortion	<5 % 1000 Hz; 0.25 W	

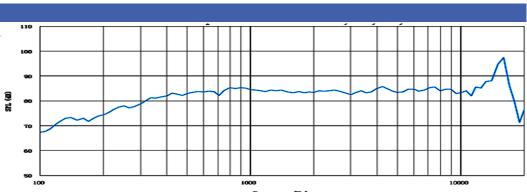

Physical Characteristics


ЛΑП	\Box	Λ Ι	- 0
VIA I	ĸı	Αl	_0

Housing	Plastic
Cone	Aluminum with Foam Edge
Magnet	NdFeB
Solder Tab	Copper

TEMPERATURE RANGES

Operating	-20 to +60 °C
Storage	-25 to +70 °C

Weight 17 g

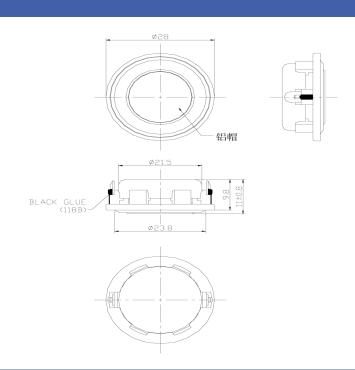

Revision	Description	Ву	Date
1-2019	Migrate to new format	WS	2019-06-21

Warranty: For a period of one (1) year from date of shipping under normal operations conditions This warranty does not apply to products damaged through misuse, abuse, improper installation, alteration, rework, or attempt to repair.