

INDICATORS • SPEAKERS • SOUND TRANSDUCERS • ENCLOSURES • MICROPHONES • BATTERY ACCESSORIES

CS29-00T130-12-1

Former P/N: CES295R120AAE08PMN1300PR

 Rev. 1-2019
 RoHS3 & REACH
 Round Speakers


Operating Characteristics

ELECTRICAL

Rated Power	0.1 W
Short Term Max Power	0.15 W
Impedance	8 Ω ± 20 % 1000 Hz; 0.125 W

ACOUSTIC: Baffle Board

f_0	1300 Hz ± 25 % 0.125 W
Freq. Range	1300 to 10000 Hz
Rated SPL	82 ± 3 dB 1200 Hz; 0.1 W; 10 cm;
Distortion	<10 % 1000 Hz; 0.15 W



Physical Characteristics


MATERIALS

Housing	MPPO
Cone	Mylar
Magnet	NdFeB
PC Pin	Tin Plated Copper

TEMPERATURE RANGES

Operating	-40 to +70 °C
Storage	-40 to +70 °C

Weight 10 g

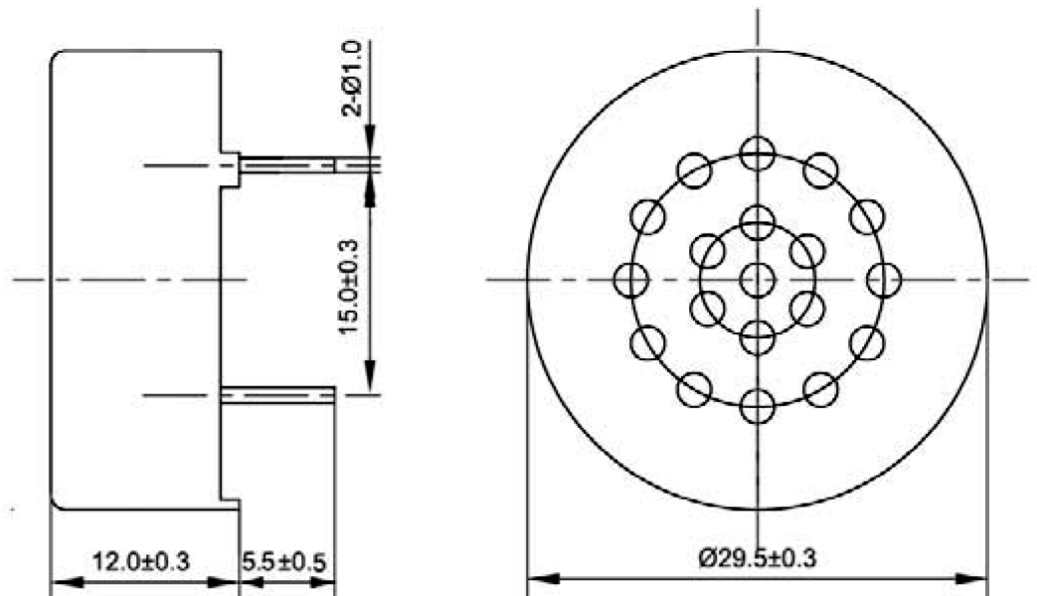

Revision	Description	By	Date
1-2019	migrate to new format	WS	2019-06-21

Warranty: For a period of one (1) year from date of shipping under normal operations conditions This warranty does not apply to products damaged through misuse, abuse, improper installation, alteration, rework, or attempt to repair.