

INDICATORS • SPEAKERS • SOUND TRANSDUCERS • ENCLOSURES • MICROPHONES • BATTERY ACCESSORIES


CS32-02D25-15-1

Former P/N: CS32O-0225-151

Rev. 1-2019
RoHS3 & REACH
Square Speakers



Operating Characteristics

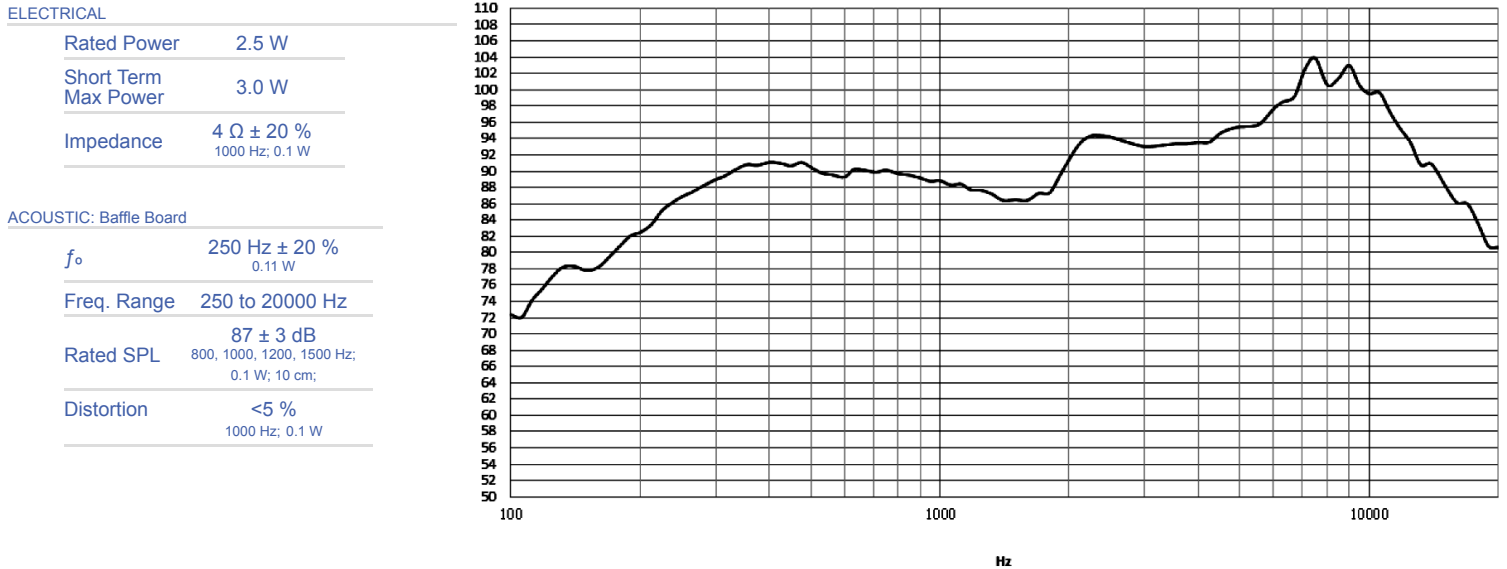



Physical Characteristics

MATERIALS	
Housing	SPCC
Cone	PET with Foam Surround Edge
Magnet	NdFeB
Solder Tab	Iron

TEMPERATURE RANGES	
Operating	-20 to +60 °C
Storage	-30 to +70 °C

Weight 29 g

Unless otherwise specified, tolerance: ±0.5(unit: mm)

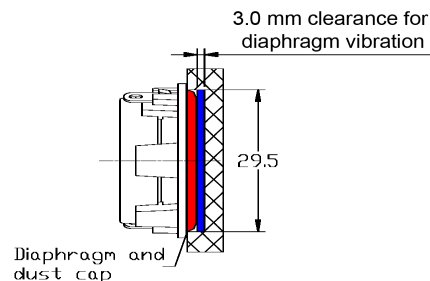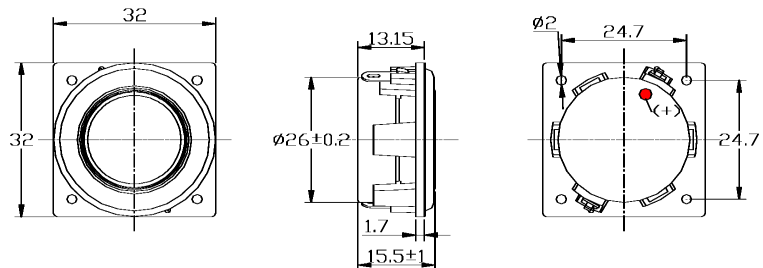

Revision	Description	By	Date
0-2019	Initial Specification Sheet	JL	2019-02-19
1-2019	Migrate to new format.	CF	2019-06-24

Warranty: For a period of one (1) year from date of shipping under normal operations conditions This warranty does not apply to products damaged through misuse, abuse, improper installation, alteration, rework, or attempt to repair.