

## CS34-00W140-17-1

Rev. 0-2026  
RoHS3 & REACH  
Receiver Speakers




### Operating Characteristics

#### ELECTRICAL

Rated Power	0.01 W
Short Term Max Power	0.02 W
Impedance	150 $\Omega$ $\pm$ 15 % 1,000 Hz; 0.007 W

#### ACOUSTIC: IEC-318 Artificial Ear

$f_o$	1,400 Hz $\pm$ 20 % 0.007 W
Freq. Range	300 to 3,400 Hz
Rated SPL	98 $\pm$ 2 dB 1,000 Hz; AVG; 0.000024 W;
Distortion	< 5 % 1,000 Hz; 0.01 W

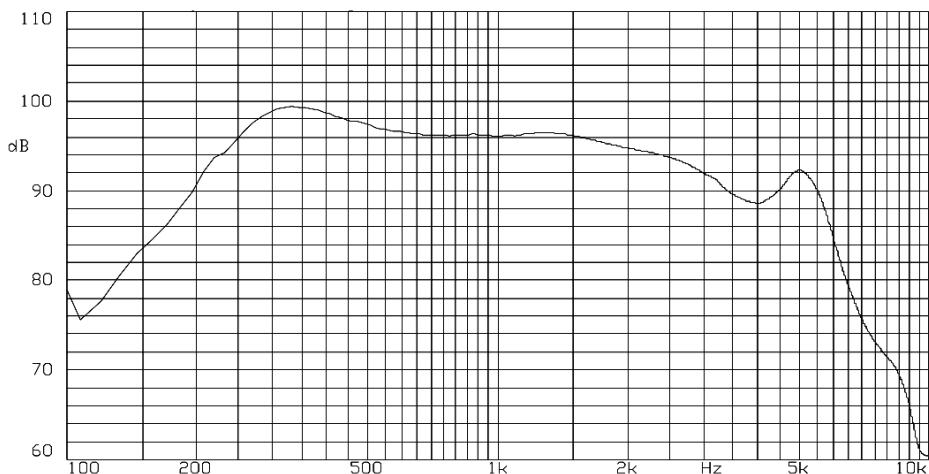

### Physical Characteristics


#### MATERIALS

Housing	ABS
Cone	PET
Magnet	Ferrite
Wire	UL1571, 28AWG
Connector	JST PHR-2 Equivalent

#### TEMPERATURE RANGES

Operating	-25 to +55 °C
Storage	-30 to +60 °C

Weight	31 g
--------	------

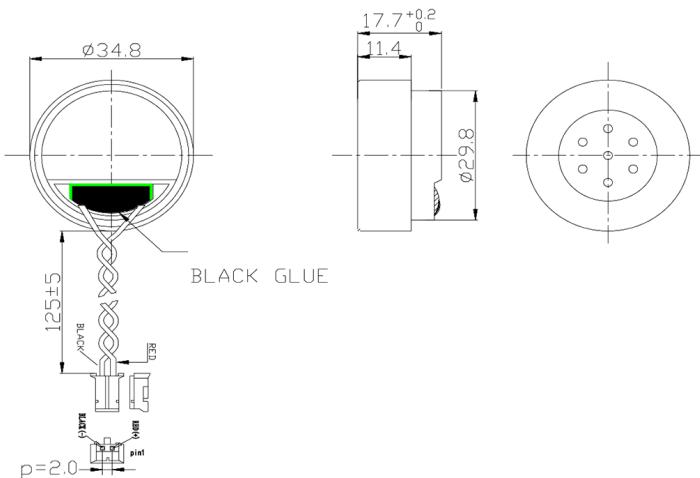

General tolerance =  $\pm$ 0.5 mm and all measurements in mm unless otherwise noted.

Revision	Description	By	Date
0-2026	Original Specification	KG	2026-01-29

Warranty: For a period of one (1) year from date of shipping under normal operations conditions. This warranty does not apply to products damaged through misuse, abuse, improper installation, alteration, rework, or attempt to repair.

The information contained herein is believed to be correct, but no guarantee or warranty, express or implied, with respect to accuracy, completeness or results is extended and no liability is assumed. Challenge Electronics reserves the right to make changes in any specification, data or material contained herein.