

Tel: 1-800-722-8197 1-631-595-2217 Fax: 1-631-667-5484 EMAIL: sales@challelec.com WEB: www.challengeelectronics.com ISO 9001/14001:2015 Certified

INDICATORS • SPEAKERS • SOUND TRANSDUCERS • ENCLOSURES • MICROPHONES • BATTERY ACCESSORIES

CS44-02D20-11-1

Rev. 0-2019 RoHS3 & REACH Round Speakers



Operating Characteristics ELECTRICAL 130 Rated Power 2 W 120 Short Term Max Power 3 W 110 4 Ω ± 15 % Impedance 100 1000 Hz: 2 W 90 9 ACOUSTIC: Baffle Board 돐 80 200 Hz ± 20 % fo 70 Freq. Range 200 to 20000 Hz 100 ± 3 dB 60 Rated SPL 500, 1000, 2000, 4000 Hz; 2 W; 10 cm; 50 Distortion 5 % ăñ 1000 Hz; 2 W 100 1000 10000 Frequency (Hz)

Physical Characteristics

MATERIALS Housing

Housing PBT

Cone Aluminum & Foam

Magnet NdFeB


Pin Copper

TEMPERATURE RANGES

Operating -25 to +70 °C
Storage -20 to +60 °C

Weight 20 g

Unless otherwise specified, tolerance:±0.3(unit: mm)

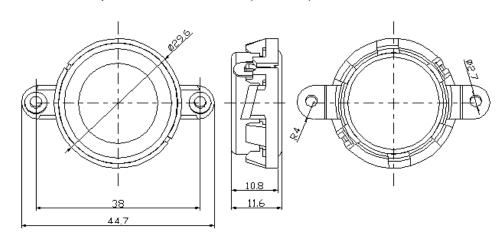

Revision	Description	Ву	Date
0-2019	initial specification	SP	2019-11-14

Warranty: For a period of one (1) year from date of shipping under normal operations conditions This warranty does not apply to products damaged through misuse, abuse, improper installation, alteration, rework, or attempt to repair.