

INDICATORS • SPEAKERS • SOUND TRANSDUCERS • ENCLOSURES • MICROPHONES • BATTERY ACCESSORIES

## CS46-01T60-07-1

Former P/N: CES465S161BF08PMN600P8.3FR

Rev. 2-2019  
RoHS3 & REACH  
Square Speakers

PHOTO  
UNAVAILABLE


### Operating Characteristics

#### ELECTRICAL

Rated Power	1.0 W
Short Term Max Power	1.5 W
Impedance	8 Ω ± 15 % 1000 Hz; 0.125 W

#### ACOUSTIC: Baffle Board

$f_0$	600 ± 150 Hz 0.125 W
Freq. Range	600 to 5000 Hz
Rated SPL	93 ± 3 dB 600, 800, 1000, 1200 Hz; 0.1 W; 10 cm;
Distortion	<5 % 1000 Hz; 1 W

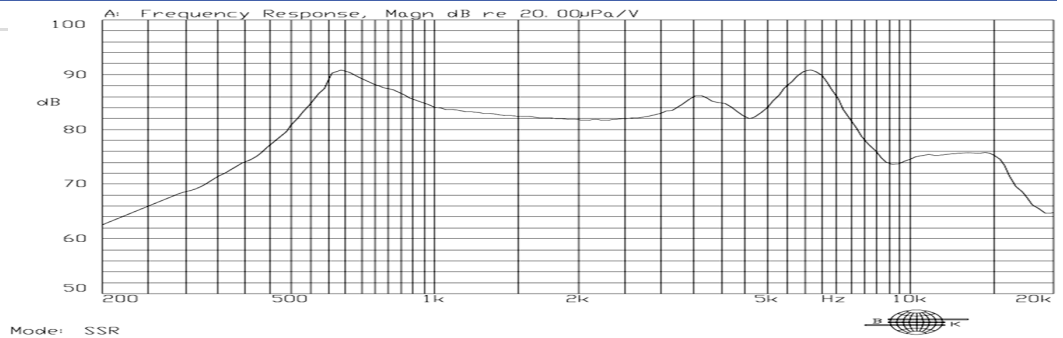

### Physical Characteristics


#### MATERIALS

Housing	Plastic
Cone	Mylar
Magnet	NdFeB

#### TEMPERATURE RANGES

Operating	-40 to +85 °C
Storage	-40 to +85 °C

Weight	9 g
--------	-----

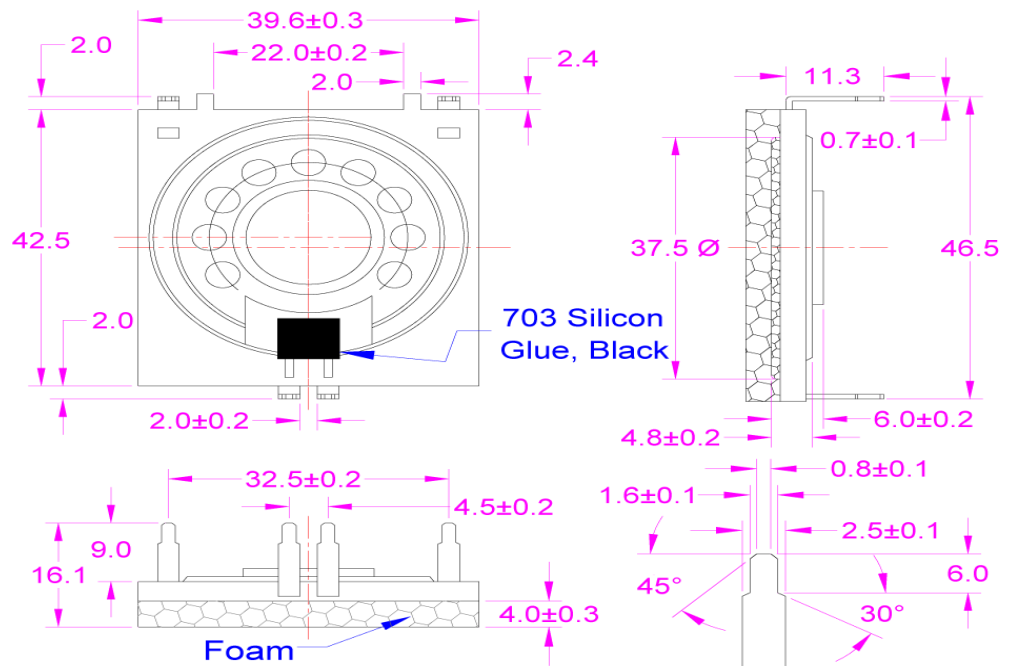

Revision	Description	By	Date
2-2019	Migrate to new format	WS	2019-06-21

Warranty: For a period of one (1) year from date of shipping under normal operations conditions This warranty does not apply to products damaged through misuse, abuse, improper installation, alteration, rework, or attempt to repair.