

CS46-05D05-28-1

Rev. 0-2025
RoHS3 & REACH
Exciter Speakers




Operating Characteristics

ELECTRICAL

Rated Power	5 W
Short Term Max Power	10 W
Impedance	4 Ω ± 20 % 1,000 Hz; 1 W

ACOUSTIC:

f_0	55 ± 20 Hz 1 W
Freq. Range	35 to 20,000 Hz

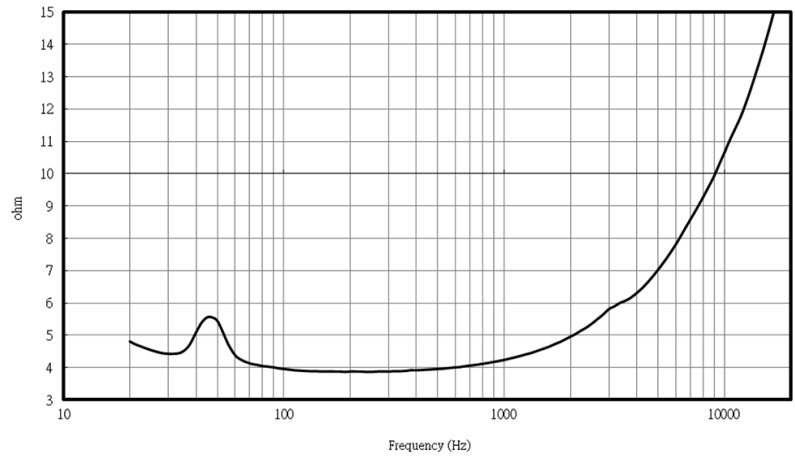

Physical Characteristics


MATERIALS

Housing	SPCC
Cone	Foam
Magnet	NdFeB
Solder Tab	Stainless Steel Tin Plated

TEMPERATURE RANGES

Operating	-40 to +105 °C
Storage	-40 to +105 °C

Weight 100 g

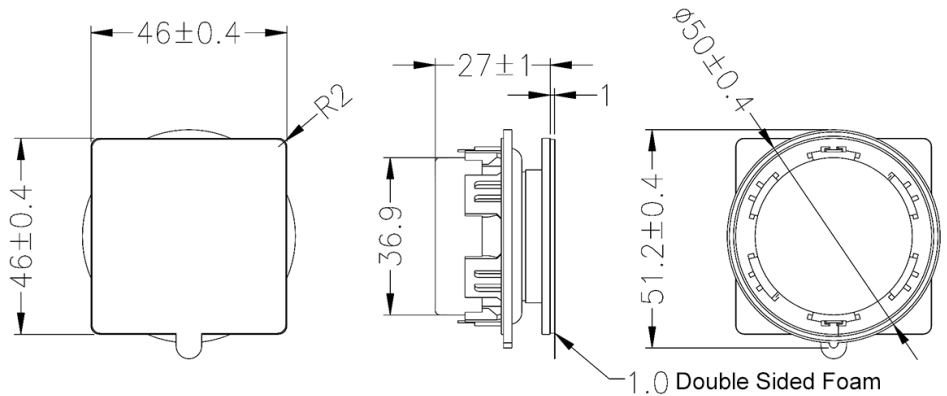

General tolerance = ±0.5 mm and all measurements in mm unless otherwise noted.

Revision	Description	By	Date
0-2025	Original Specification	KG	2025-02-25

Warranty: For a period of one (1) year from date of shipping under normal operations conditions. This warranty does not apply to products damaged through misuse, abuse, improper installation, alteration, rework, or attempt to repair.

The information contained herein is believed to be correct, but no guarantee or warranty, express or implied, with respect to accuracy, completeness or results is extended and no liability is assumed. Challenge Electronics reserves the right to make changes in any specification, data or material contained herein.