

INDICATORS • SPEAKERS • SOUND TRANSDUCERS • ENCLOSURES • MICROPHONES • BATTERY ACCESSORIES

CS66-01D38-18-1

Former P/N: CES660R180CA08SMN380TR

Rev. 1-2019
RoHS3 & REACH
Round Speakers

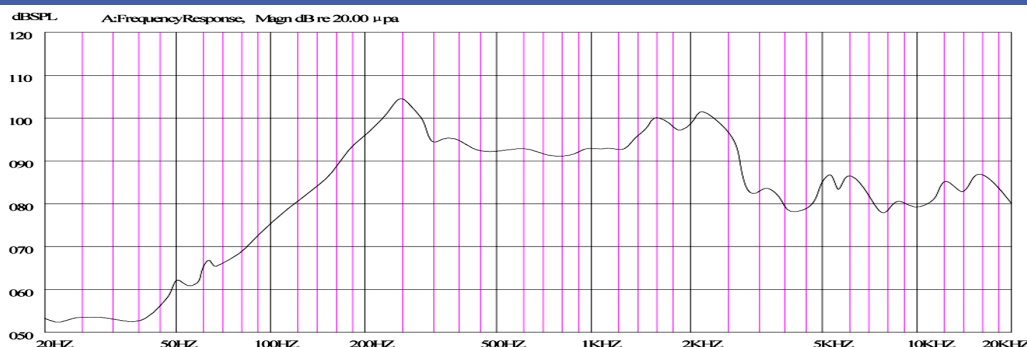

Operating Characteristics

ELECTRICAL

Rated Power	1.0 W
Short Term Max Power	2.0 W
Impedance	8 Ω $\pm$ 15 % 1000 Hz; 0.125 W

ACOUSTIC: Baffle Board

f_0	380 Hz $\pm$ 20 % 0.125 W
Freq. Range	380 to 5000 Hz
Rated SPL	92 $\pm$ 3 dB 600, 800, 1000, 1200 Hz; 0.1 W; 10 cm;
Distortion	<5 % 1000 Hz; 0.125 W



Physical Characteristics

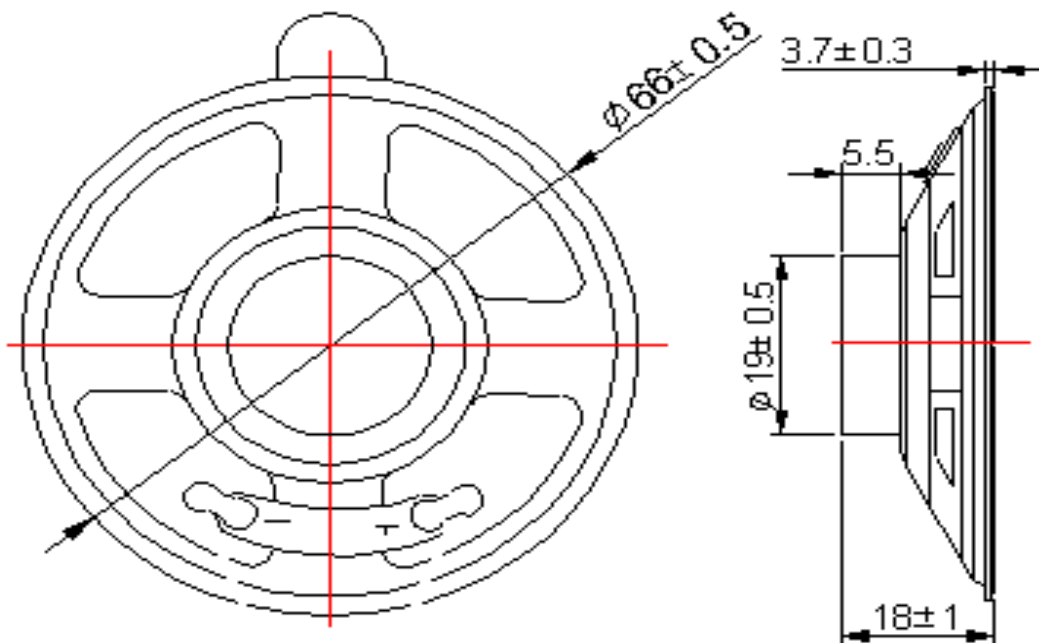
MATERIALS

Housing	Steel
Cone	Mylar
Magnet	NdFeB

TEMPERATURE RANGES

Operating	-20 to +55 $^{\circ}$ C
Storage	-20 to +55 $^{\circ}$ C

Weight	23 g
--------	------



Revision	Description	By	Date
1-2019	Migrate to new format	WS	2019-06-21

Warranty: For a period of one (1) year from date of shipping under normal operations conditions This warranty does not apply to products damaged through misuse, abuse, improper installation, alteration, rework, or attempt to repair.

The information contained herein is believed to be correct, but no guarantee or warranty, express or implied, with respect to accuracy, completeness or results is extended and no liability is assumed. Challenge Electronics reserves the right to make changes in any specification, data or material contained herein.
©2019 Challenge Electronics, Inc. 20190826155214