


CT08E-16S400-2

 Rev. 0-2024
 RoHS3 & REACH
 Electromagnetic Sound Transducers


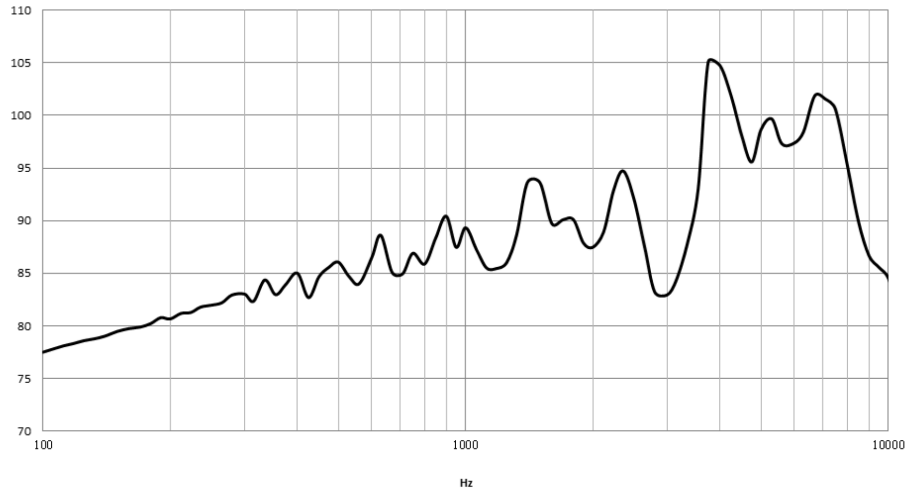
Operating Characteristics

ELECTRICAL

Rated Voltage	12 Vo-p
Operating Voltage	8 to 16 Vo-p
Coil Resistance	100 ± 14 Ω
Max Current at V Rated	80 mA

ACOUSTIC

Min SPL at V Rated	100 dB
Test Conditions	10 cm
f_o	4000 Hz



Physical Characteristics


MATERIAL

Housing	LCP
Diaphragm	Iron
Solder Pads	Brass

TEMPERATURE RANGES

Operating	-40 to +85 °C
Storage	-40 to +85 °C

Weight 0.6 g

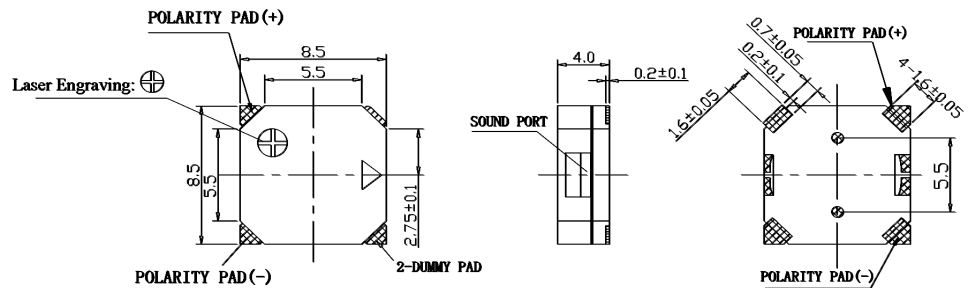

General tolerance = ±0.5 mm and all measurements in mm unless otherwise noted.

Revision	Description	By	Date
0-2024	Original Specification	JL	2024-08-29


Warranty: For a period of one (1) year from date of shipping under normal operations conditions. This warranty does not apply to products damaged through misuse, abuse, improper installation, alteration, rework, or attempt to repair.

The information contained herein is believed to be correct, but no guarantee or warranty, express or implied, with respect to accuracy, completeness or results is extended and no liability is assumed. Challenge Electronics reserves the right to make changes in any specification, data or material contained herein.


CT08E-16S400-2

 Rev. 0-2024
 RoHS3 & REACH
 Electromagnetic Sound Transducers



Recommended Footprint

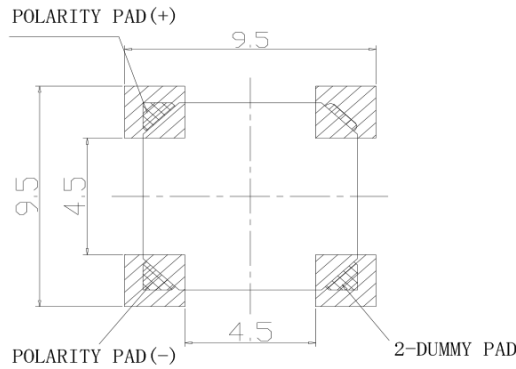

Recommended Reflow Profile

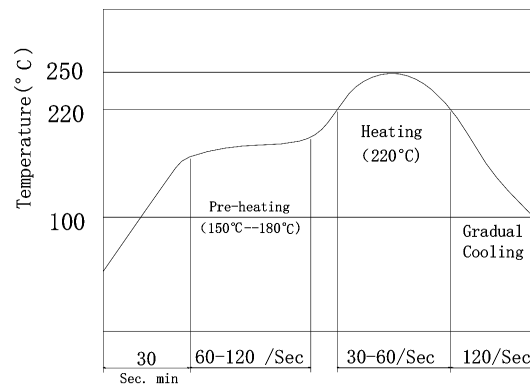

Tape & Reel Packaging

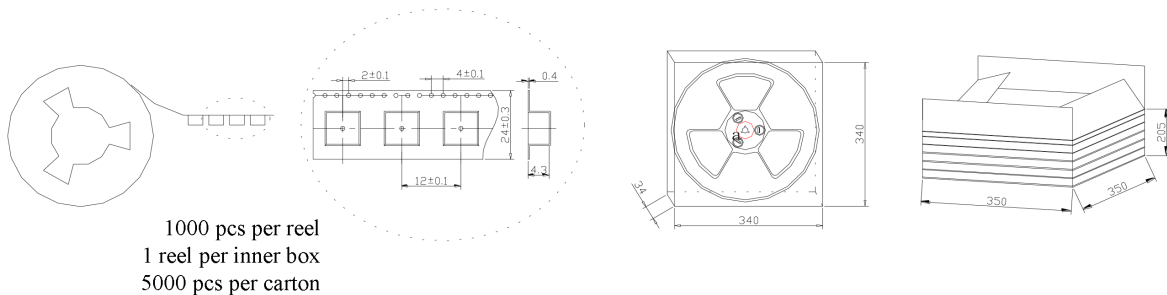

Revision	Description	By	Date
0-2024	Original Specification	JL	2024-08-29

Warranty: For a period of one (1) year from date of shipping under normal operations conditions. This warranty does not apply to products damaged through misuse, abuse, improper installation, alteration, rework, or attempt to repair.

The information contained herein is believed to be correct, but no guarantee or warranty, express or implied, with respect to accuracy, completeness or results is extended and no liability is assumed. Challenge Electronics reserves the right to make changes in any specification, data or material contained herein.