

## CS15-00P85-03-3

Rev. 2-2019  
RoHS3 & REACH  
Round Speakers




### Operating Characteristics

#### ELECTRICAL

Rated Power	0.5 W
Short Term Max Power	1.0 W
Impedance	8 Ω ± 15 % 2000 Hz; 0.125 W

#### ACOUSTIC: 1000CC Sealed Enclosure

$f_0$	850 Hz ± 20 % 0.125 W
Freq. Range	850 to 20000 Hz
Rated SPL	88 ± 3 dB 800, 1000, 1200, 1500 Hz; 0.1 W; 10 cm;
Distortion	<5 % 1000 Hz; 0.1 W

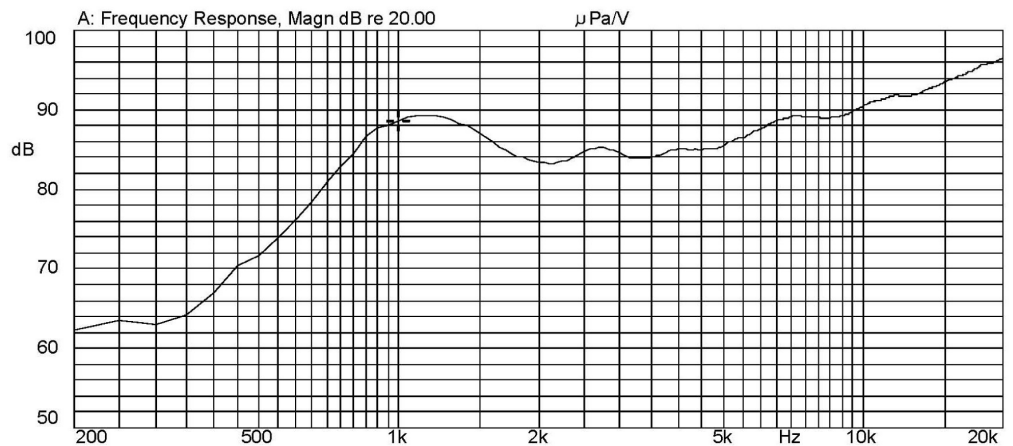

Mode: TSR



### Physical Characteristics

#### MATERIALS




Housing	Steel
Cone	Mylar
Magnet	NdFeB
Solder Pad	Tin Plated Copper

#### TEMPERATURE RANGES

Operating	-40 to +60 °C
Storage	-40 to +70 °C

Weight 1.3 g

#### MARKING

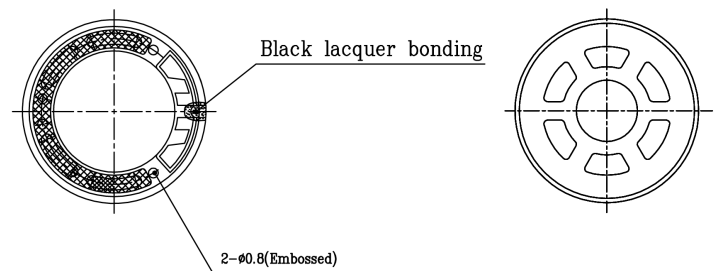

Revision	Description	By	Date
1-2019	Updated mechanical drawing with additional dimension (∅13.9mm). Updated resonant frequency test condition from 1 Vrms to 0.125 W.	JL	2019-06-13
2-2019	Migrate to new format.	CF	2019-06-24

Warranty: For a period of one (1) year from date of shipping under normal operations conditions This warranty does not apply to products damaged through misuse, abuse, improper installation, alteration, rework, or attempt to repair.

The information contained herein is believed to be correct, but no guarantee or warranty, express or implied, with respect to accuracy, completeness or results is extended and no liability is assumed. Challenge Electronics reserves the right to make changes in any specification, data or material contained herein.